



Roughness calibration for the SMOS L-MEB model



M. Crapeau, J.P. Wigneron, Y. Kerr,
J.C. Calvet, P. De Rosnay, K. Saleh, A. Mialon

2nd Workshop on Remote Sensing and
Modeling of Surface Properties
Toulouse, 10 June 2009



Why roughness calibration ?



- Principle : simultaneously retrieval of several surface parameters from multi-angular radiometric data with a least-squares iterative method
- Focused parameters:
 - Soil moisture (SM)
 - Vegetation optical thickness (τ)
 - Surface roughness (H_R) ←



The SMOREX experiment



- Both radiometric and in-situ measurements
 - LEWIS: L-band dual pol. radiometer
 - Incidence angle from 20° to 60°
 - 8 data sets every day
 - Ground installation:
 - Meteorology
 - Soil moisture and temperature profile
 - Biomass measurements, soil texture,...
- 2 surfaces: Bare soil and Fallow
- 6 years of data acquisition






Using *SM* in-situ data to calibrate H_R



- *SM* in-situ measurements as input parameter in L-MEB to invert H_R
(Saleh et al. 2007)

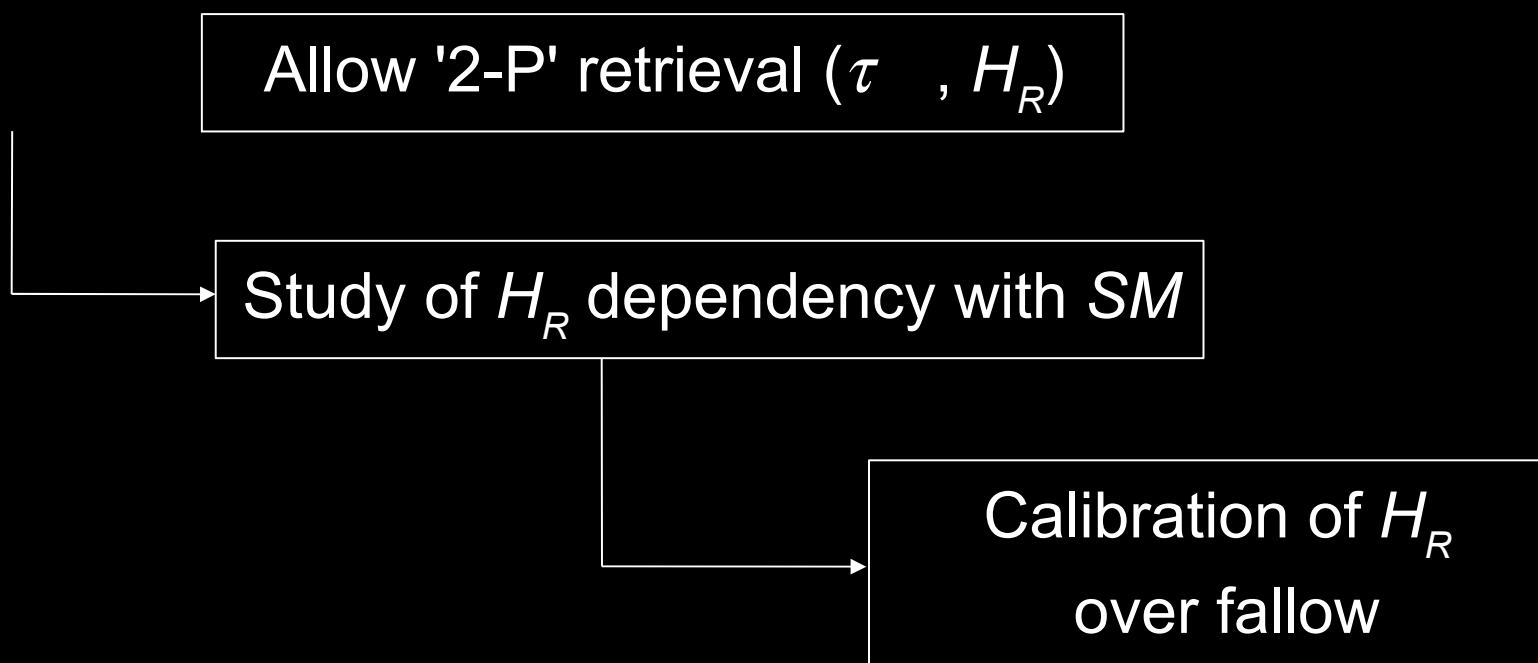




Using SM in-situ data to calibrate H_R



- (τ, H_R) inversions with measured SM :
 - H_R can be calibrated with a linear dependency on SM

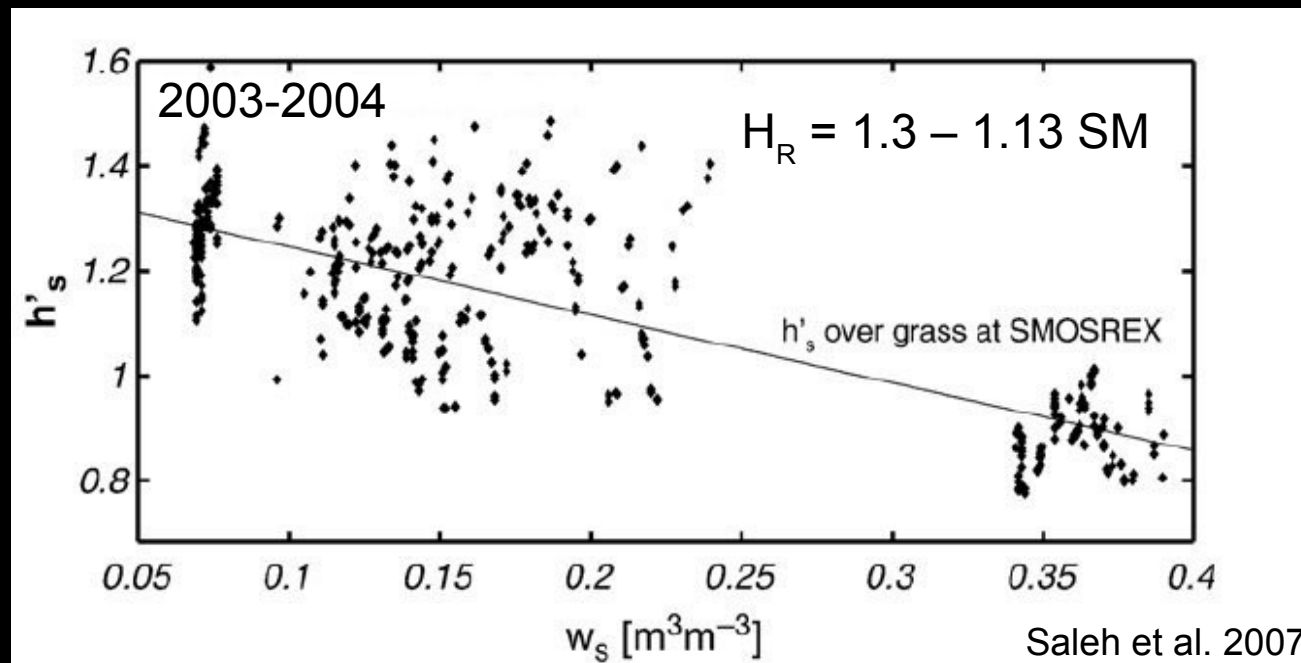




Using SM in-situ data to calibrate H_R



- (τ, SM) inversions with calibrated H_R :
 - Good correlation between retrieved and measured SM

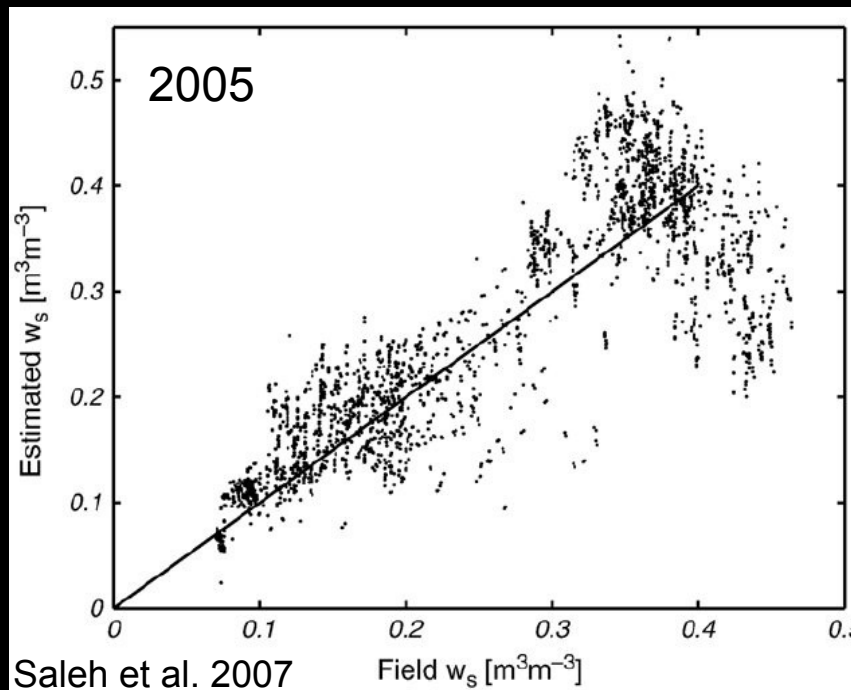

$$H_R = 1.3 - 1.13 SM$$


$$RMSE = 0.057 m^3 \cdot m^{-3}$$



Roughness calibration without *SM* in-situ data



- Calibrate H_R without on-field measurements
- Solution: using of observations where *SM* is theoretically known → Theoretical *SM* values as L-MEB input param.
- How to select dry and wet observations ?

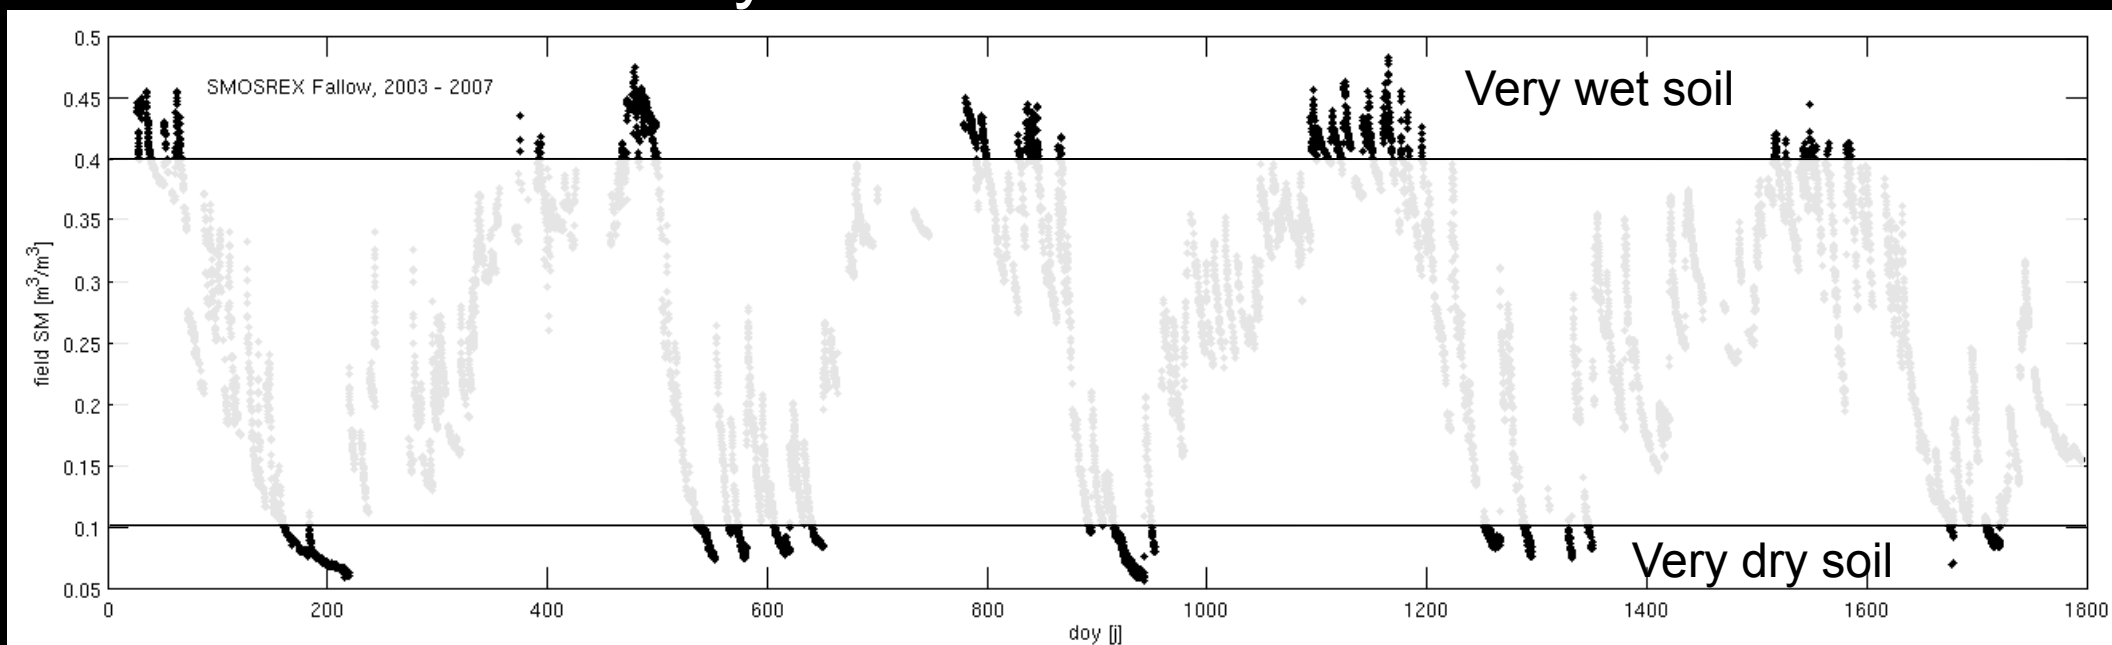




Iterative scheme for sub-sets selection



- 2P-2P retrieval iterative method

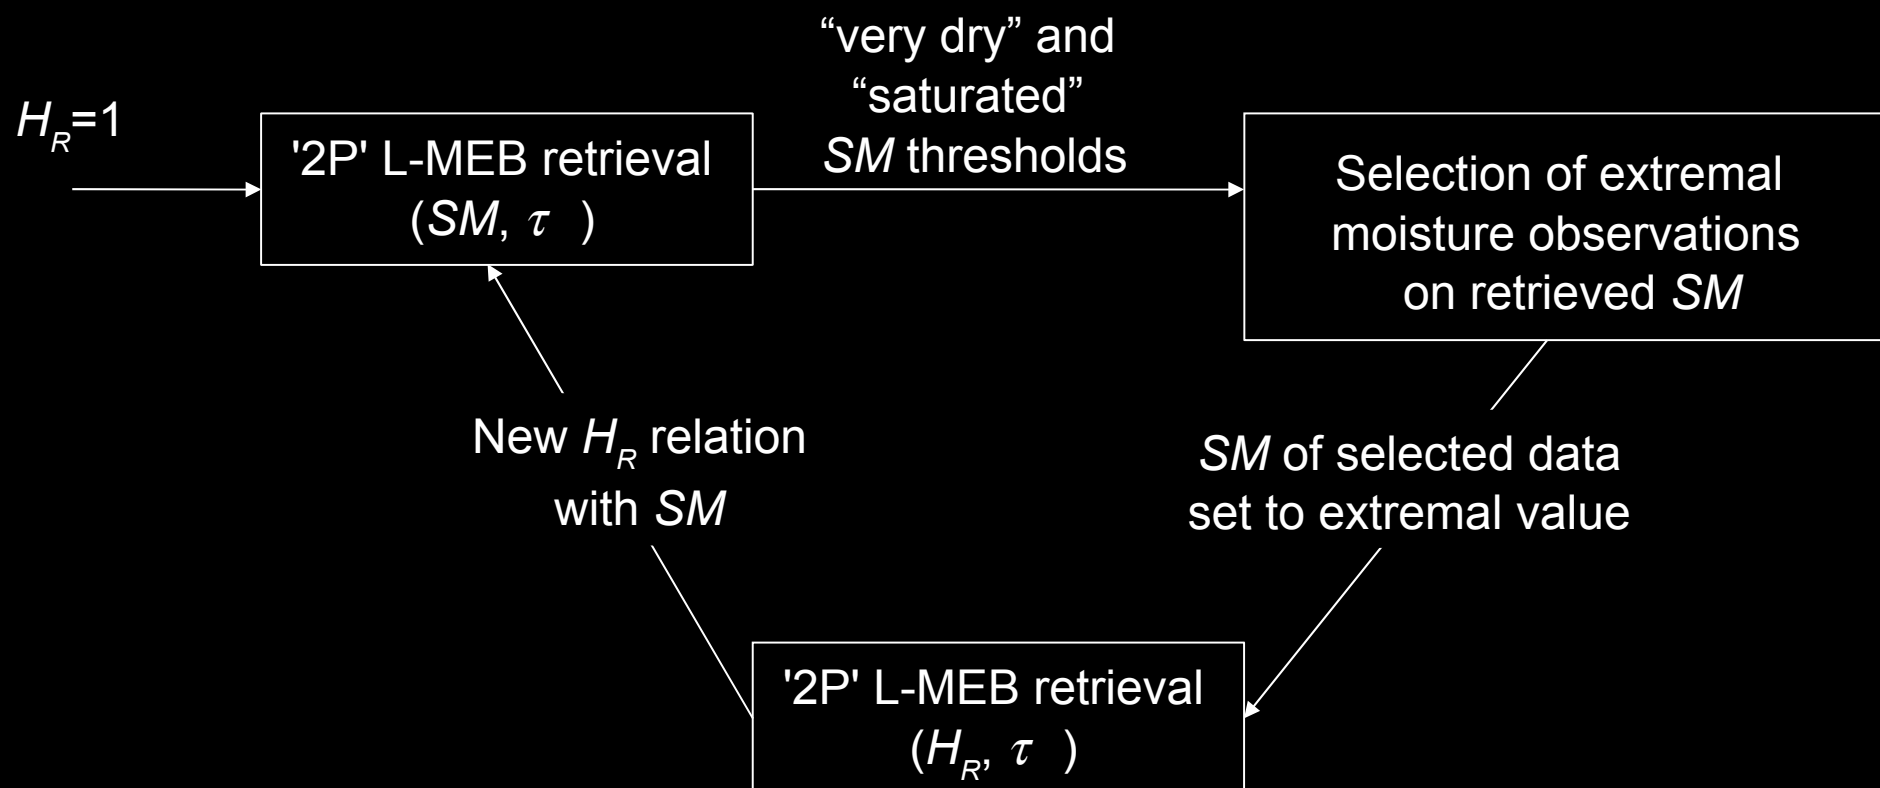




Roughness calibration with 2P-2P iterative method



- Convergence lead to an improvement of the *SM* retrieval

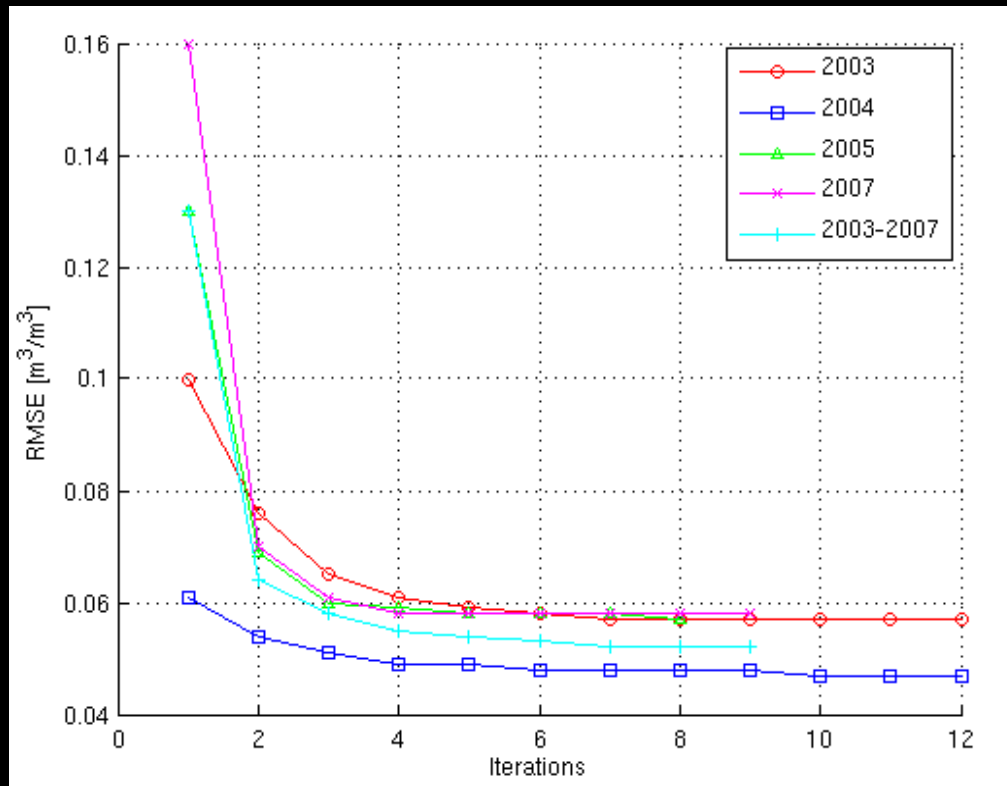


But no
convergence
for 2006...



Roughness calibration with 2P-2P iterative method



- (SM, τ) retrievals with H_R calibrated with 2P-2P iterative method

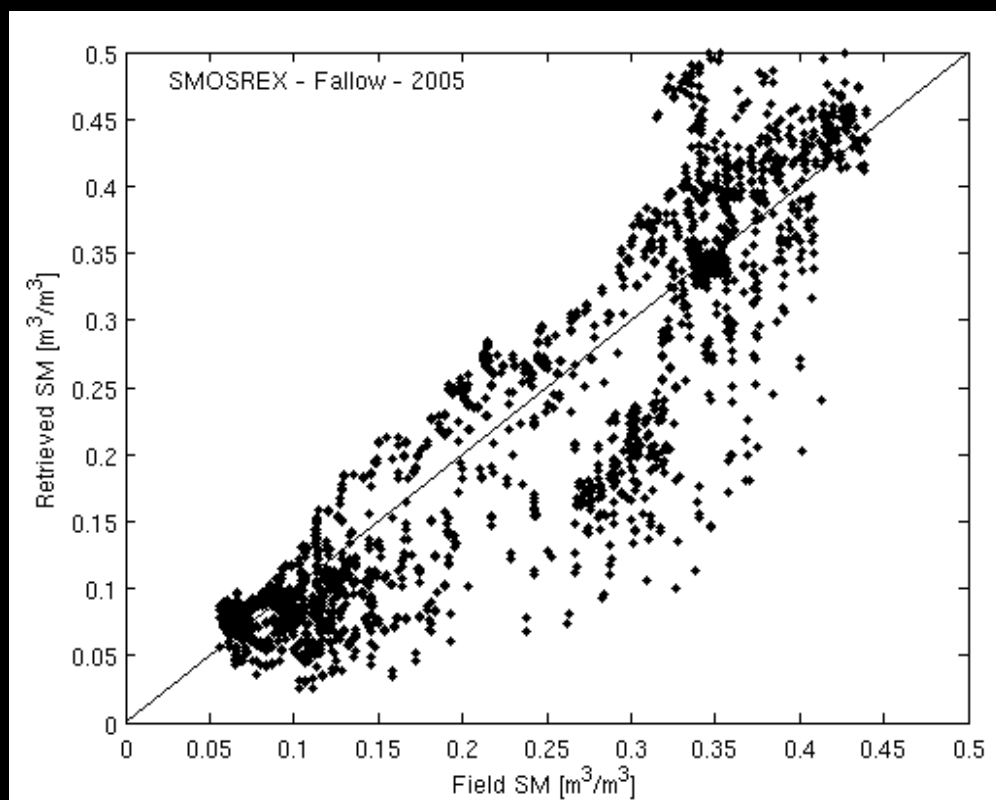

2005
Fallow

$$H_R = 1.33 - 1.2 SM$$

$$\text{RMSE} = 0.058 \text{ m}^3.\text{m}^{-3}$$



Roughness calibration with 2P-2P iterative method



- 2P-2P iterative method results for 2003 to 2007 SMOSREX data sets

	Saleh et al. 07 calibration	Iterative methode
2003	0.043	0.057
2004	0.052	0.048
2005	0.055	0.058
2006	0.039	X
2007	0.070	0.058
2003-2004	0.044	0.053
2003-2007	0.055	0.052

RMSE of SM retrievals over SMOSREX fallow



Conclusion



- Surface roughness can be calibrated without any soil moisture measurements by using theoretical estimations for period of extremal of soil moisture
- Results are almost as good as calibration done with *SM* on-field measurements
 - Effective calibration method for experiments extended in time (like SMOS)
- Improvements on initial conditions, sub-sets selection and convergence are in progress