



Advanced Infrared Sounding System for Future Geostationary Satellites

Timothy J. Schmit[@], [Jun Li](#)[#]

Hal Bloom[&], James J. Gurka[&]


Jaime Daniels[@], Mitch Goldberg[@]

Steve Ackerman[#], Paul Menzel[#], and Hank Revercomb[#]

[@] NOAA/NESDIS/Satellite Applications and Research

[#] SSEC/CIMSS, University of Wisconsin-Madison

[&] GOES-R Program Office, NESDIS/NOAA

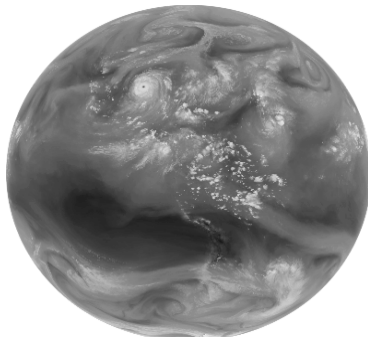

*International TOVS Study
Conferences (ITSC)-XVI*

*Angra dos Reis, Brazil,
7 - 12 May 2008*



Overview

- While broadband geo-sounder has proven useful, GEO hyper-spectral IR sounding instrument will provide measurements that better serve user requirements, this is very important for supporting regional and convective-scale NWP over CONUS.
- Nowcasting and very-short range forecasting will also benefit from these 3D fields from the monitoring of moisture convergence (with critical low-level moisture) and convective instability and improving warnings of location and intensity of convective storms.

Outline

- GOES/GOES-R Summary
- ‘Nowcasting’ applications
- NWP applications
- Other applications
 - winds, air quality, SST, clouds, etc.
- Economic benefits
- Summary
- More information

AIRS measurements overlay on GOES IR image (Hurricane Dean)

LEO data have limitation on monitoring hurricane due to orbital gap and low temporal resolution.

High temporal resolution is unique aspect of GEO IR measurements



A geostationary hyper-spectral sounder could provide full hourly disk coverage rather than the partial coverage available with polar orbiting sounders.

GOES-R Instruments

- **Advanced Baseline Imager (ABI)**
 - Implementation phase
 - Contractor: ITT Corporation
- **Space Weather**
 - Space Environmental In-Situ Suite (SEISS)
 - Implementation phase
 - Contractor: Assurance Technology Corporation (ATC)
 - Solar Ultra Violet Imager (SUVI)
 - Implementation contract was awarded to Lockheed Martin Advanced Technology Center
 - Extreme Ultra Violet/X-Ray Irradiance Sensor (EXIS)
 - Implementation phase
 - Contractor: Laboratory for Atmospheric and Space Physics (LASP)
 - Magnetometer
 - Procured as part of spacecraft contract
- **Geostationary Lightning Mapper (GLM)**
 - Implementation contract awarded in December 2007
 - Contractor: Lockheed Martin Space Systems Company


Advanced Sounding

- Hyperspectral Environmental Suite (HES) instrument removed from GOES-R program – August 2006
- Subsequent efforts included:
 - Assessment of ABI as source data for legacy GOES-like derived sounder products
 - NOAA Analysis of Alternatives (AOA) study
 - Advanced sounding
 - Coastal waters imaging
 - Contractor studies of advanced sounding concepts for later GOES spacecraft
- Current status
 - ABI can approximate legacy GOES sounder capabilities
 - A geostationary advanced sounder demonstration mission is being explored




Launch Schedule

- **GOES R series is a follow-on to the existing line of NOAA's geostationary weather satellites.**
 - GOES I series [8-12]: Operational since 1994
 - GOES N series [13]: N launched May 24 2006, O planned launch late 2008, P planned launch late 2009
- **Based on an availability analysis of the current GOES I and N-series, a GOES-R launch is required in the 2014 timeframe to maintain mission data continuity**

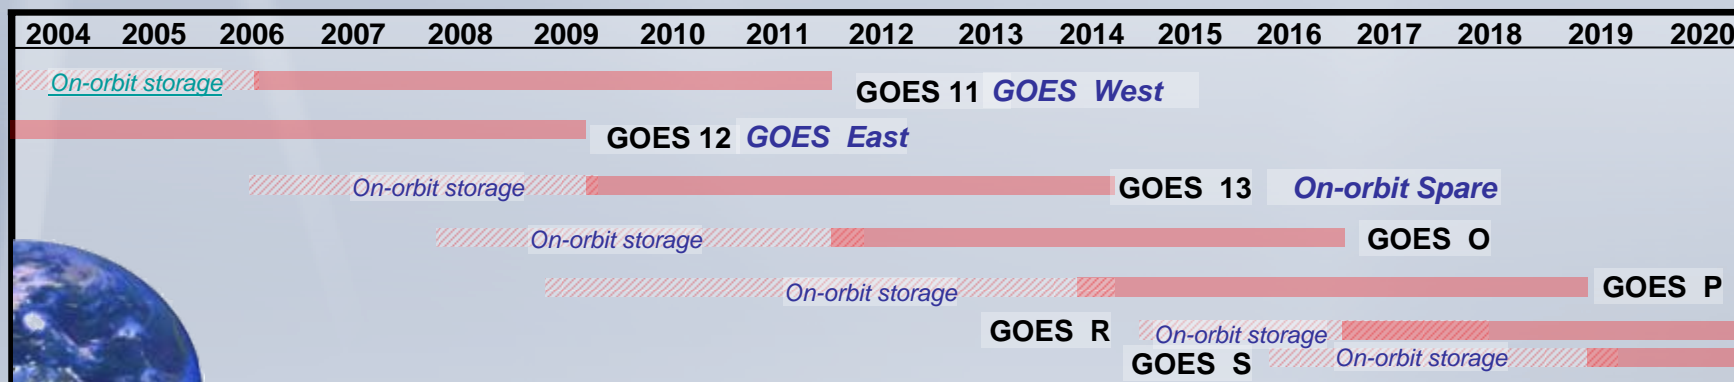


Note: Satellites are labeled with letters on the ground and changed to numbers on-orbit
***GOES T and U are currently not baselined for GOES-R series.**
Flight procurement includes these as options.

Low vs High Spectral Resolution

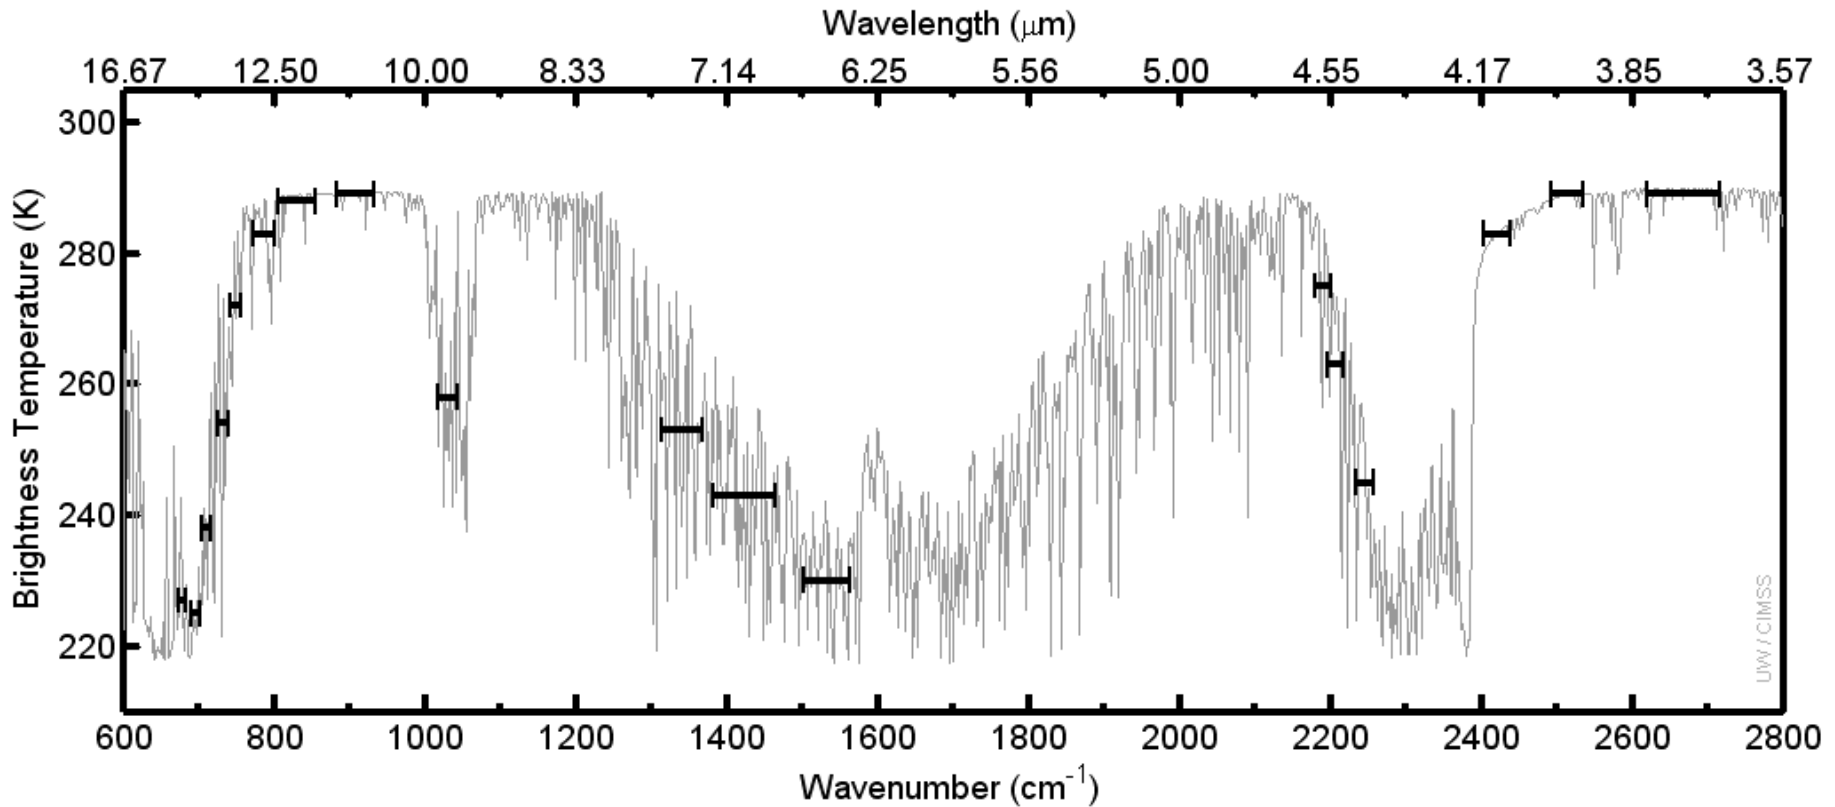

The current GOES Sounder has only 18 IR spectral data points, while a high spectral resolution sounder may have between 800 and 8000 spectral points. The broad-band nature of the current GOES limits the vertical resolution. 8

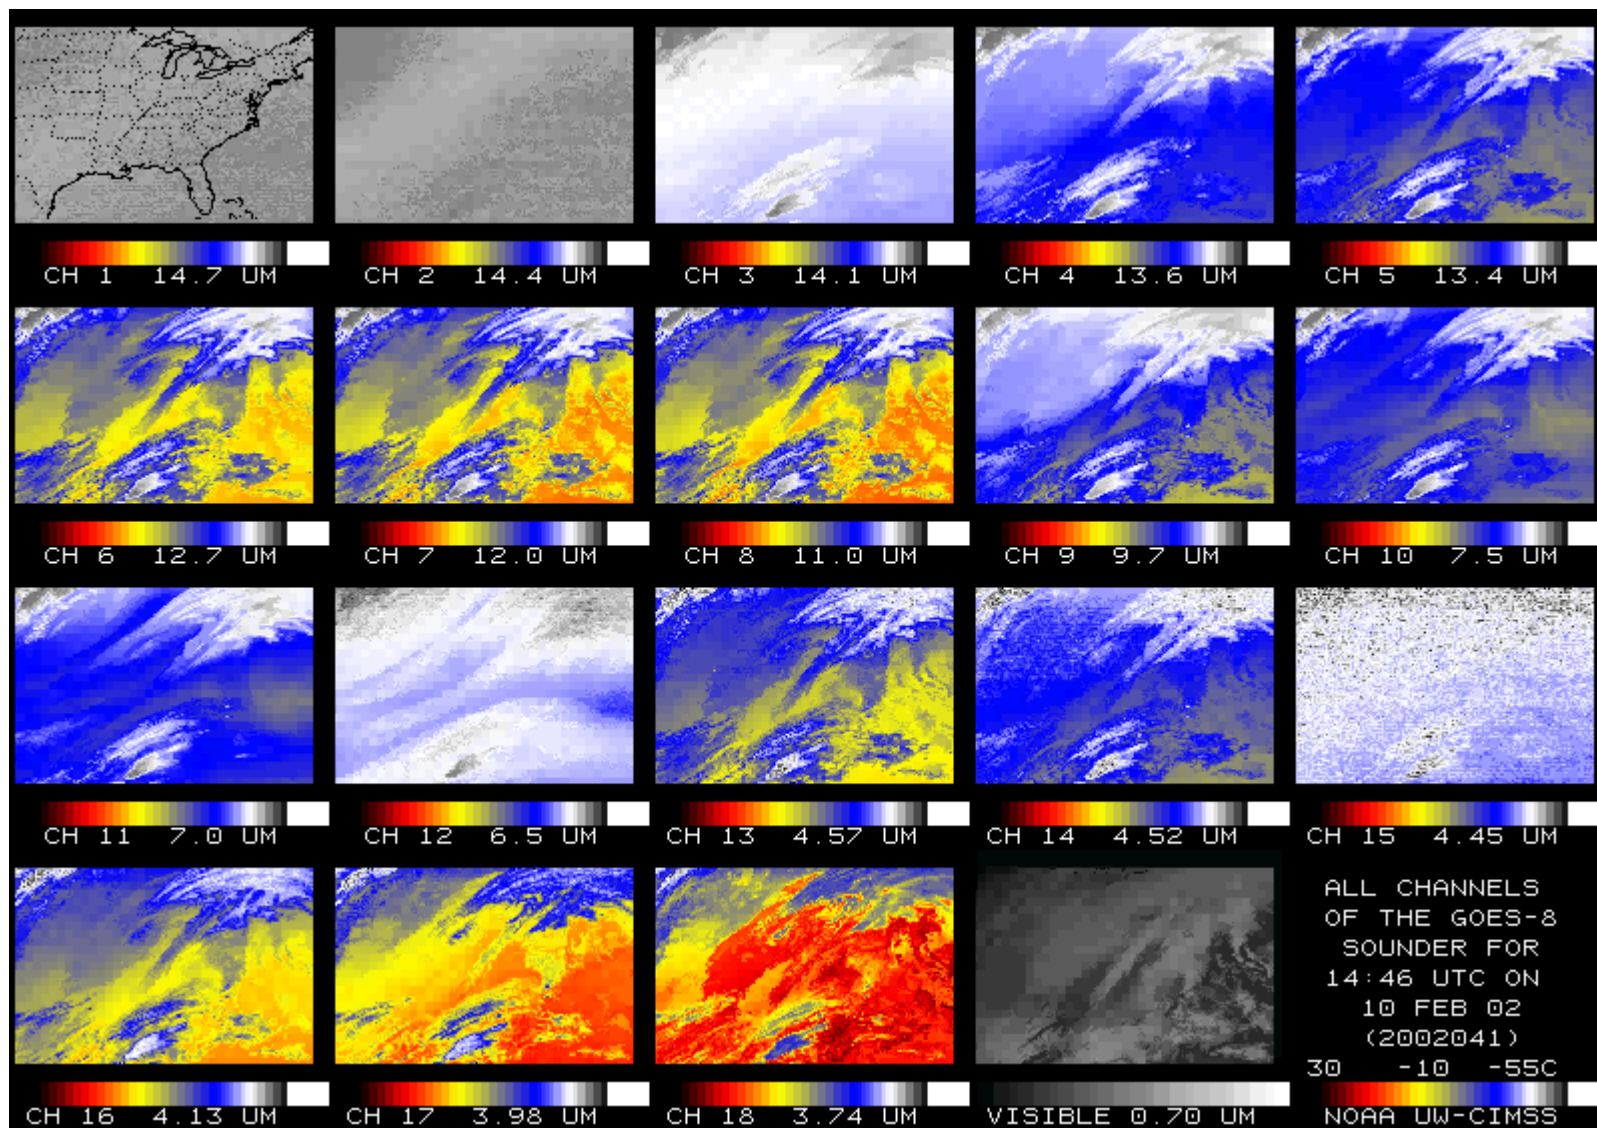

Spectral coverage (18 IR + 1 Visible band) for current GOES Sounder

Current Sounder Operational Uses

<i>GOES Sounder Product</i>	<i>Operational Use within the NWS</i>
Clear-sky Radiances	Assimilation into NCEP operational regional & global NWP models over water
Layer & Total Precipitable Water	Assimilation into NCEP operational regional & global NWP models; display and animation within NWS AWIPS for use by forecasters at NWS WFOs & National Centers in forecasting precipitation and severe weather
Cloud-top retrievals (pressure, temperature, cloud amount)	Assimilation into NCEP operational regional NWP models; display and animation within NWS AWIPS for use by forecasters at NWS WFOs; supplement to NWS/ASOS cloud measurements for generation of total cloud cover product at NWS/ASOS sites
Surface skin temperature	Image display and animation within NWS AWIPS for use by forecasters at NWS WFOs
Profiles of temperature & moisture	Display (SKEW-Ts) within NWS AWIPS for use by forecasters at NWS WFOs in forecasting precipitation and severe weather
Atmospheric stability indices	Image display and animation within NWS AWIPS for use by forecasters at NWS WFOs in forecasting precipitation and severe weather
Water Vapor Winds	Image display and animation within NWS AWIPS for use by forecasters at NWS WFOs

AWIPS Display

Lifted Index from T/q soundings in clear skies

Total Precipitable Water

GOES Sounder DPI Total Precip Water (mm) Wed 16:00Z 02-Aug-06

GOES Sounder DPI Lifted Index (C) Wed 16:00Z 02-Aug-06


Cloud-Top Height

GOES Sounder DPI Cloud Top Height (ft/100 MSL) Wed 16:00Z 02-Aug-06

Surface Skin Temperature


GOES Sounder DPI Skin Temperature (C) Wed 16:00Z 02-Aug-06

GOES Sounder Stability Indices

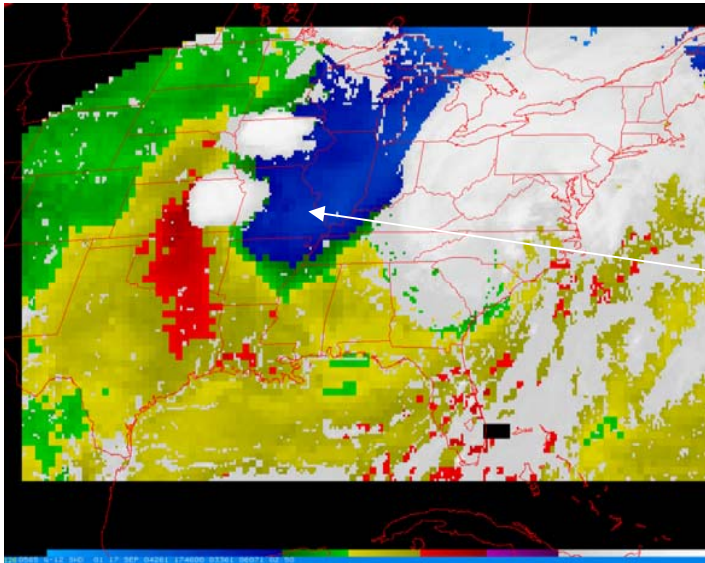


**GOES Best
Lifted Indices**

Note in both images that the instability axis lies upstream of incipient convection. Recent studies indicate that this is a favorable thermodynamic pattern for a slow moving MCS.

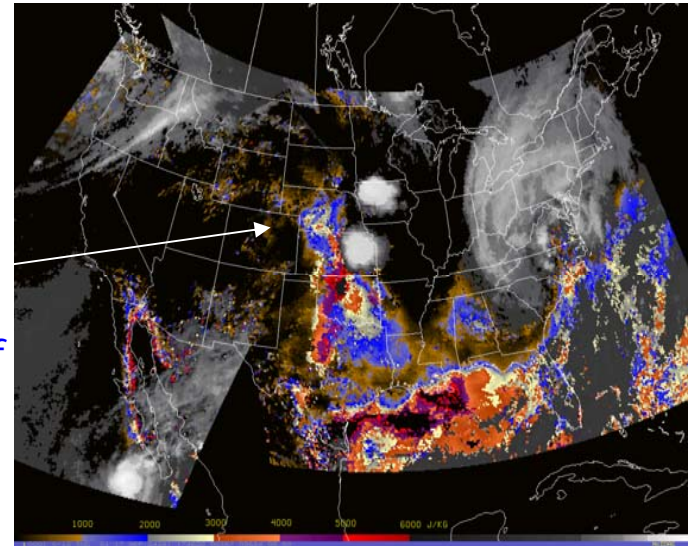

**GOES Lowest
100mb MUCAPE
(Most Unstable
CAPE)**

Forecasters value the current sounder

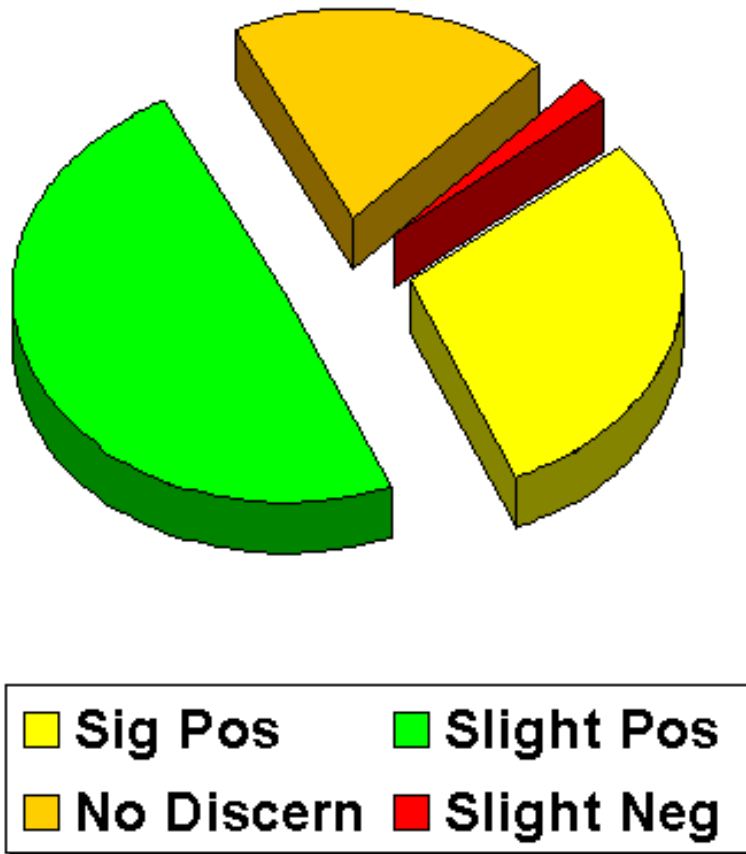

NWS Forecaster responses (Summer of 1999) to: "Rate the usefulness of LI, CAPE & CINH (changes in time/axes/gradients in the hourly product) for location/timing of thunderstorms."

There were 248 valid weather cases.

- Significant Positive Impact (30%)
- Slight Positive Impact (49%)
- No Discernible Impact (19%)
- Slight Negative Impact (2%)
- Significant Negative Impact (0)


Forecasters need a better GEO sounder

Forecasters value the current GOES sounder products; however, the same forecasters also noted several limitations of the current sounder:


- retrievals limited to clear skies;
- the scanning rate is relatively slow, which limits coverage;
- the vertical resolution from the current generation GOES radiometers is limited.

Each of these limitations can be mitigated with an advanced sounder in the geostationary perspective.


1km Temperature

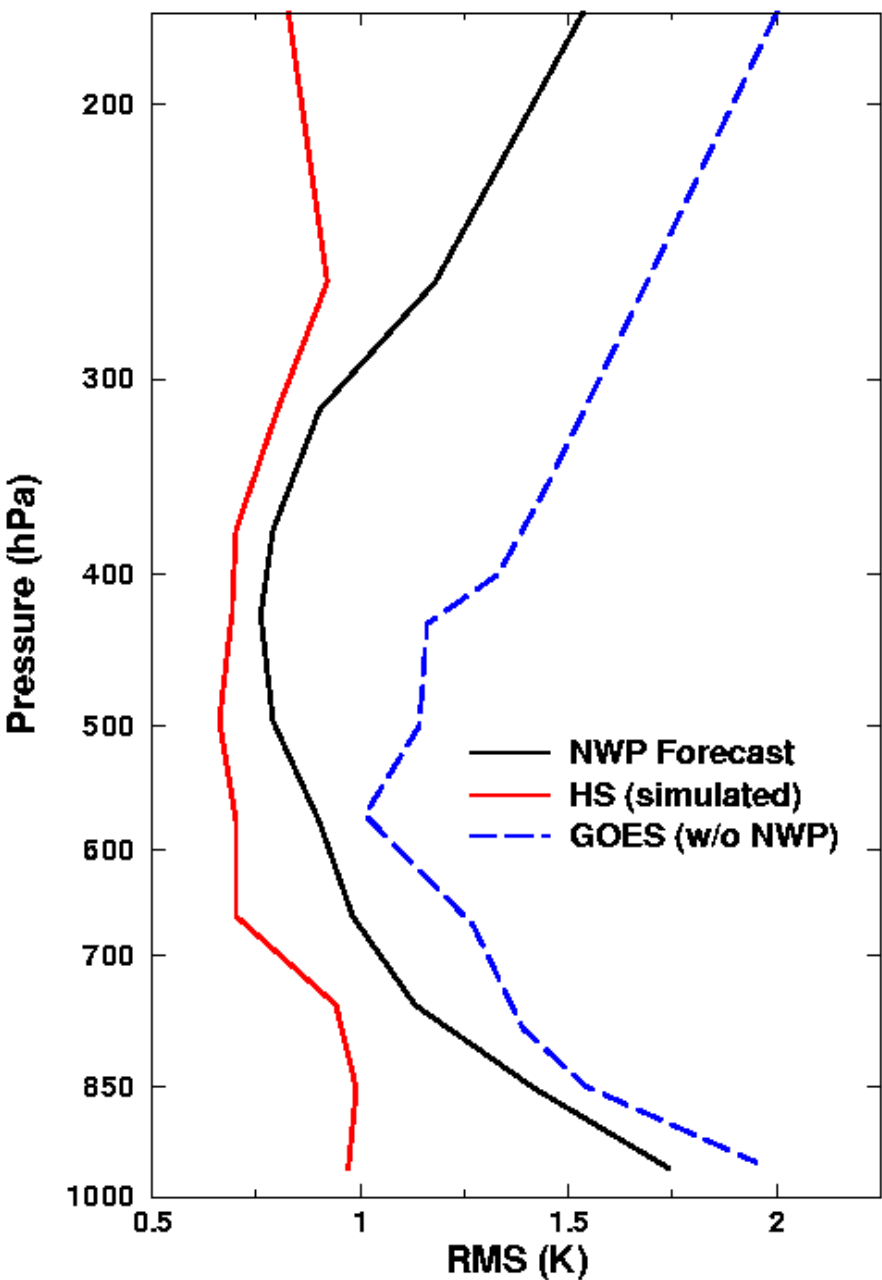


2km mixing ratio retrieval

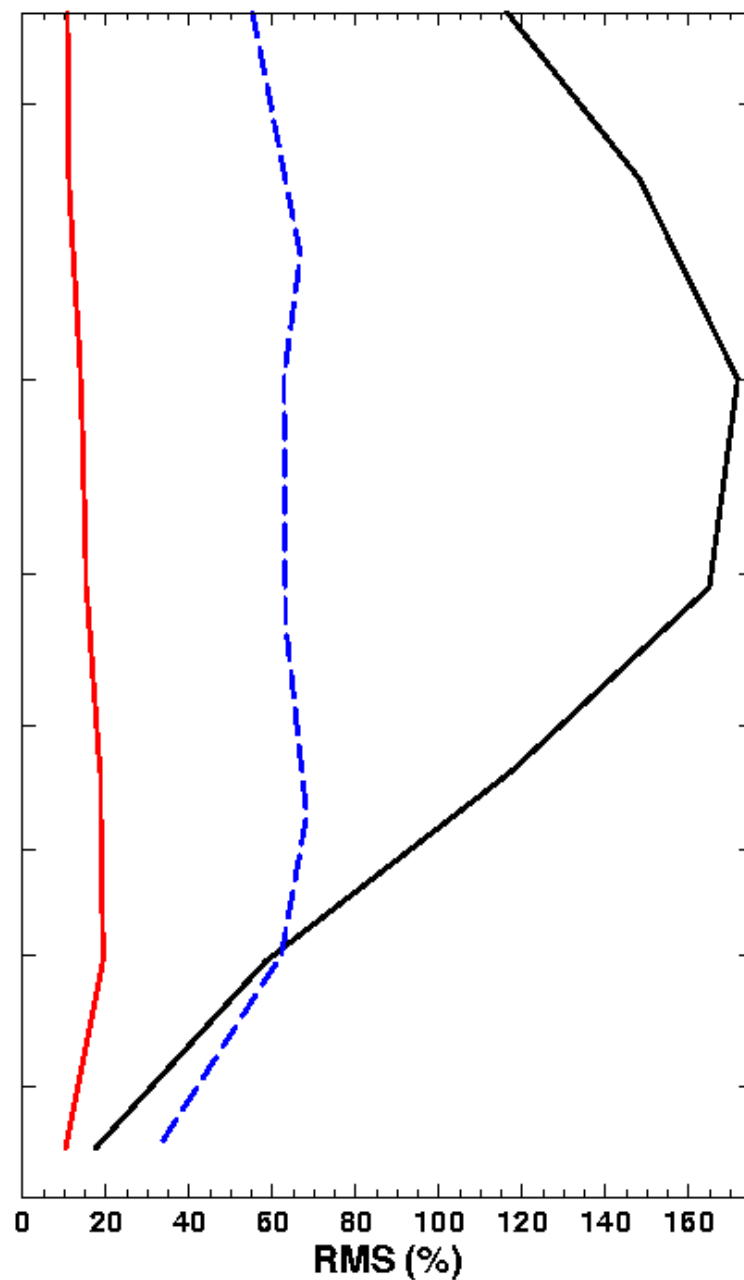

D20070429_185109.dat

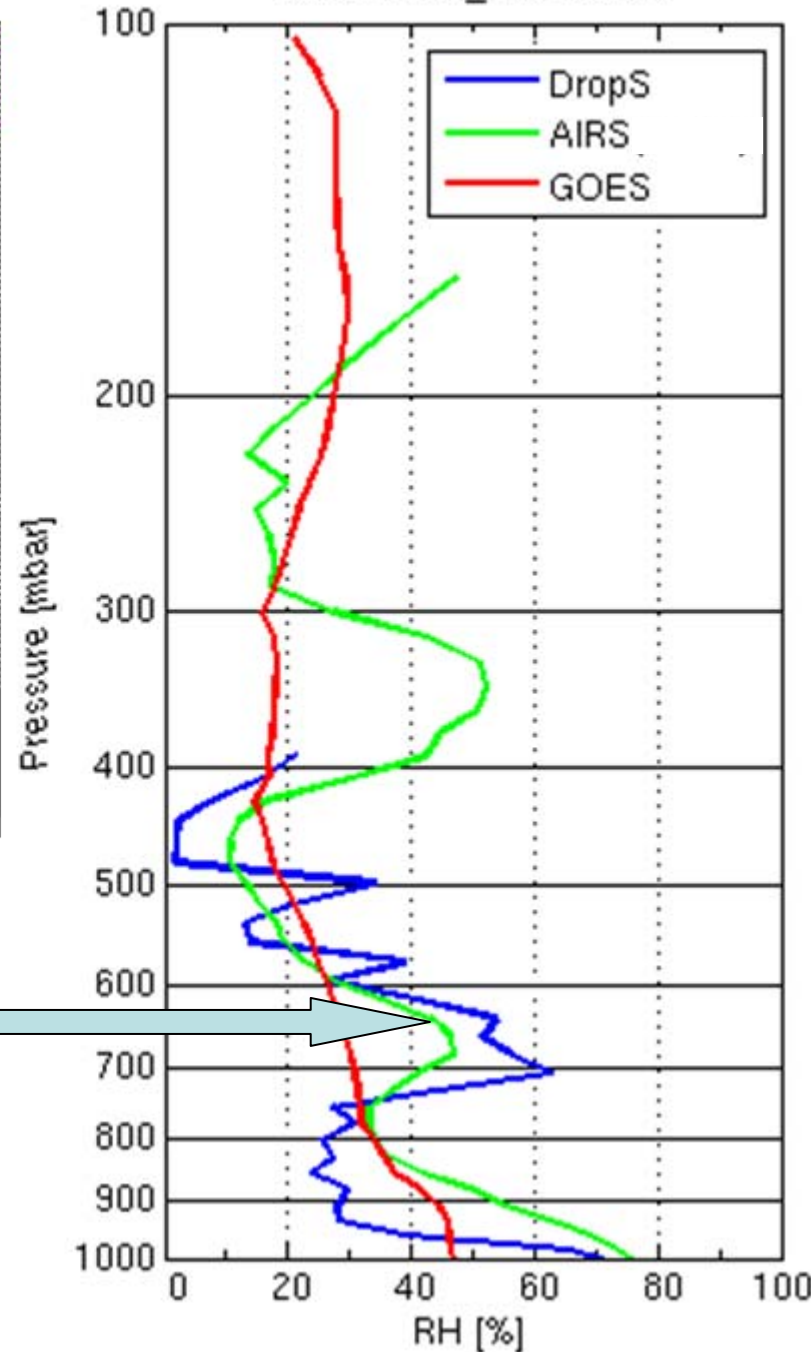

AIRS SFOV Relative Humidity (RH) sounding depicts the vertical structure while the GOES sounding (independent of FCST) has limited vertical information

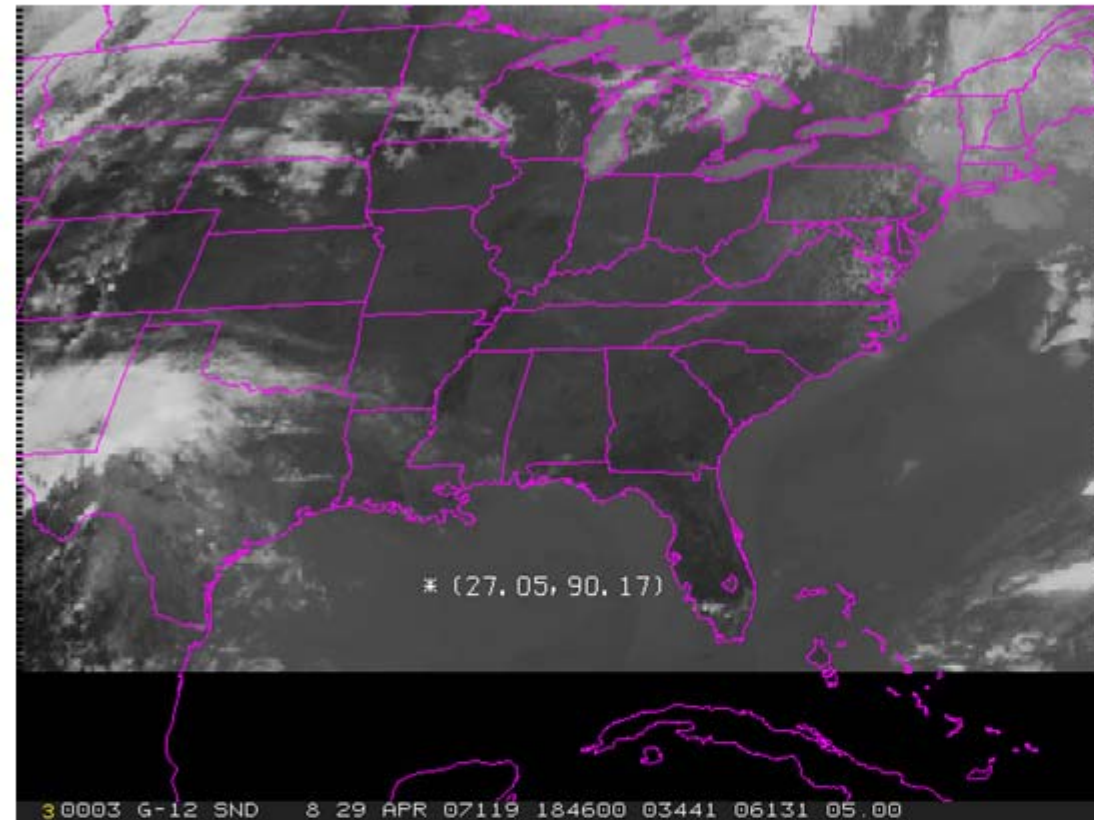

High Spectral (HS) data will help ABI

GOES-R Observational Requirements:

Aerosol Detection (including Smoke and Dust)
Aerosol Particle Size
Suspended Matter / Optical Depth
Volcanic Ash *
Aircraft Icing Threat
Cloud Imagery: Coastal
Cloud & Moisture Imagery
Cloud Layers / Heights & Thickness *
Cloud Ice Water Path *
Cloud Liquid Water
Cloud Optical Depth
Cloud Particle Size Distribution
Cloud Top Phase
Cloud Top Height *
Cloud Top Pressure *
Cloud Top Temperature *
Cloud Type
Convection Initiation
Enhanced "V"/Overshooting Top Detection
Hurricane Intensity
Low Cloud & Fog
Lightning Detection
Turbulence
Visibility

Geomagnetic Field
Probability of Rainfall
Rainfall Potential
Rainfall Rate/QPE
Legacy Atm. Vertical Moisture Profile *
Legacy Atm. Vertical Temperature Profile *
Derived Stability Indices *
Total Precipitable Water *
Total Water Content *
Clear Sky Masks
Radiances *
Absorbed Shortwave Radiation: Surface
Downward Longwave Radiation: Surface
Downward Solar Insolation: Surface
Reflected Solar Insolation: TOA
Upward Longwave Radiation *: Surface & TOA
Ozone Total *
SO₂ Detection *
Derived Motion Winds *
Fire / Hot Spot Characterization
Flood / Standing Water
Land Surface (Skin) Temperature *

Surface Albedo
Surface Emissivity *
Vegetation Fraction: Green
Vegetation Index
Currents
Sea & Lake Ice / Age
Sea & Lake Ice / Concentration
Sea & Lake Ice / Extent & Edge
Sea & Lake Ice / Motion
Ice Cover / Landlocked
Snow Cover
Snow Depth
Sea Surface Temps
Energetic Heavy Ions
Mag Electrons & Protons: Low Energy
Mag Electrons & Protons: Med & High Energy
Solar & Galactic Protons
Solar Flux: EUV
Solar Flux: X-Ray
Solar Imagery: extreme UV/X-Ray

Improved with HS

* = Products degraded from original GOES-R requirements (e.g.; now no HES)

ABI – Advanced Baseline Imager

Continuity of GOES Legacy Sounder Products from ABI

SEISS – Space Env. In-Situ Suite

EXIS – EUV and X-Ray Irradiance Sensors

GLM – Geostationary Lightning Mapper


Magnetometer

SUVI – Solar extreme UltraViolet Imager




High-spectral for nowcasting

- Rapid storm growth in the ‘truth’ fields begins when the storm enters the area of convective instability.
 - Requires knowledge of strong vertical gradients of temperature and especially moisture.
- HES showed the development of instability earlier than the ABI alone – by several hours.
- ABI under-estimated the convective instability by 20-30% compared to the HES (for this case).

06-12-2002, 1200 UTC
Total Precipitable Water [mm]

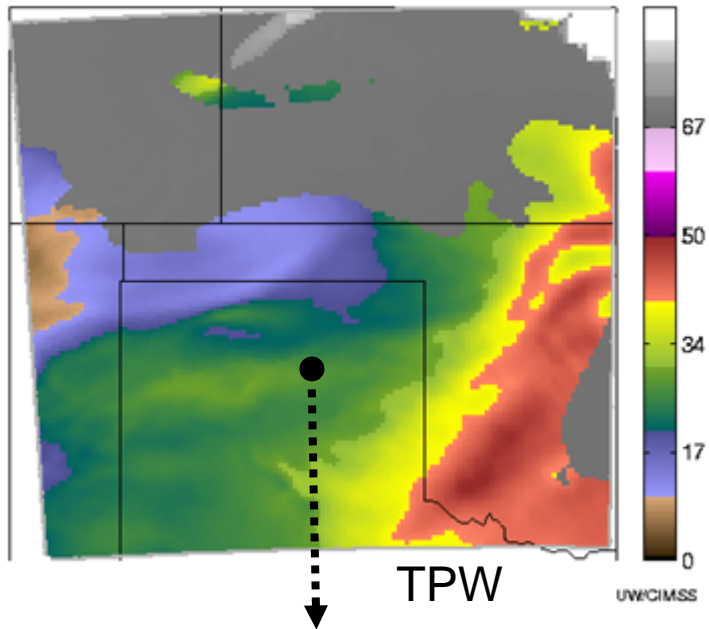





06-12-2002, 1200 UTC
Lifted Index [°C]

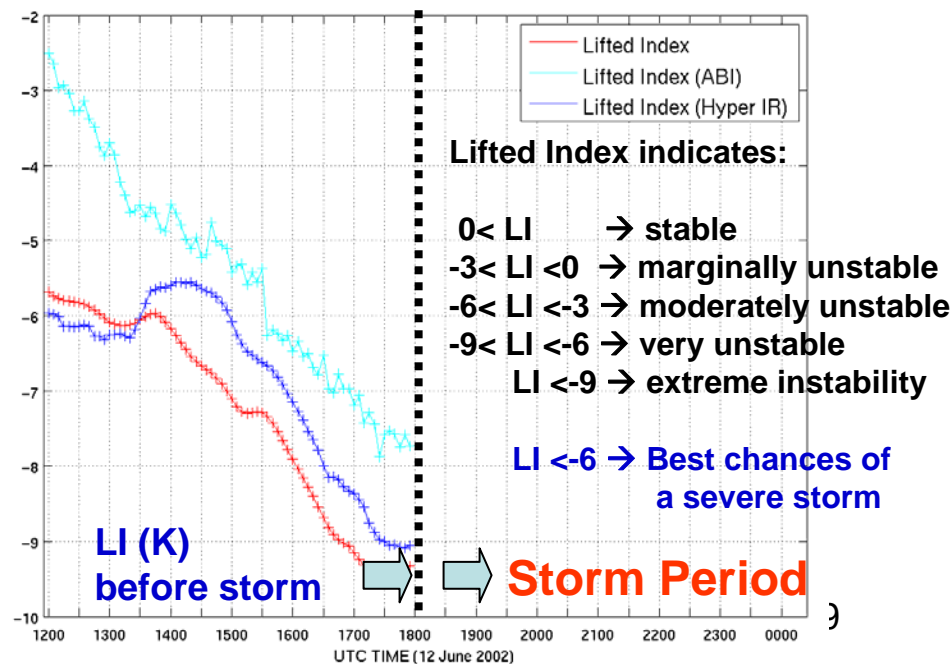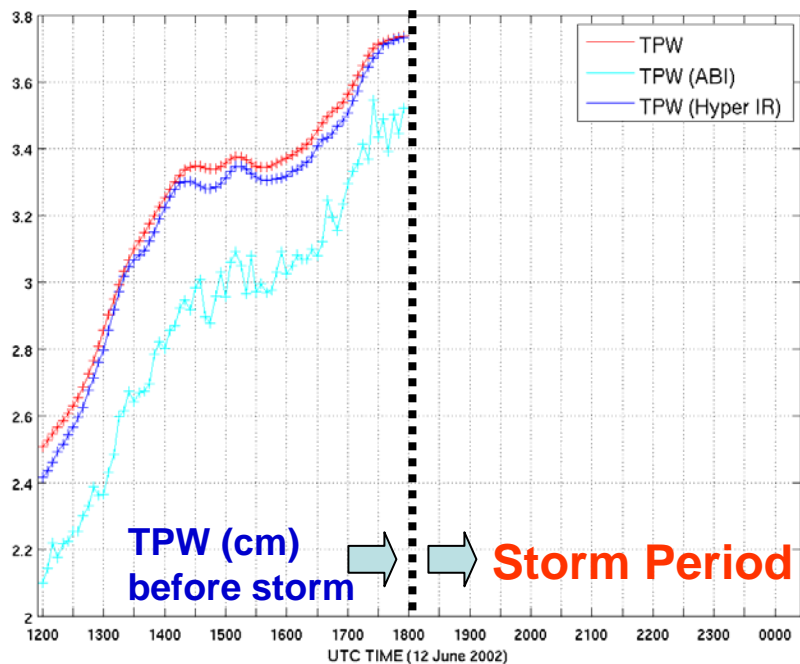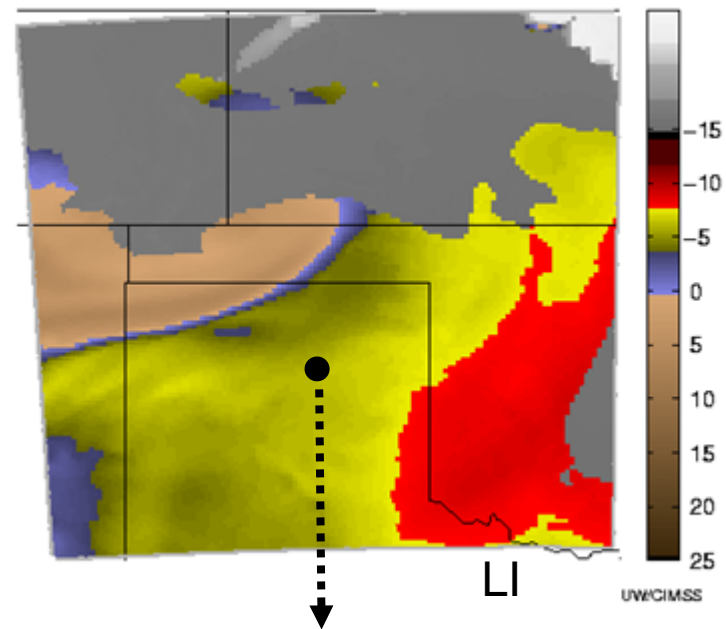


GOES Sounder and Advanced IR results are based on simulated retrievals

06/12/2002 1200 Z 800 - 600 hPa θ_e


HES RTVL

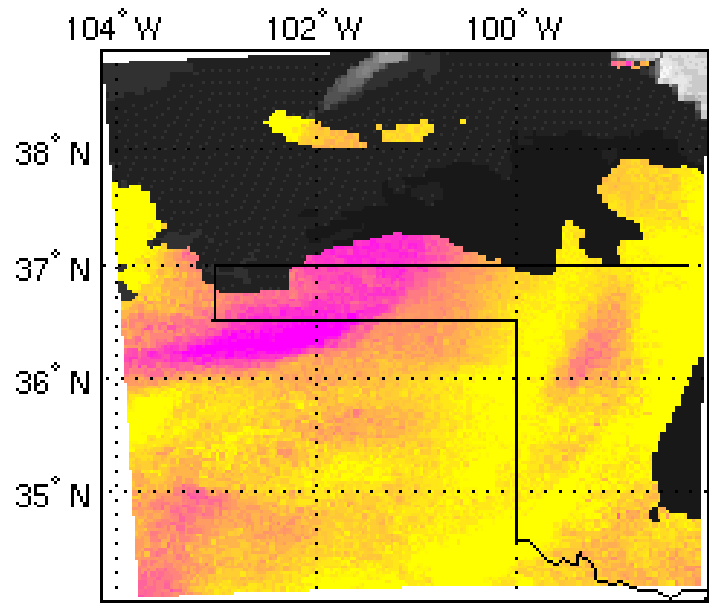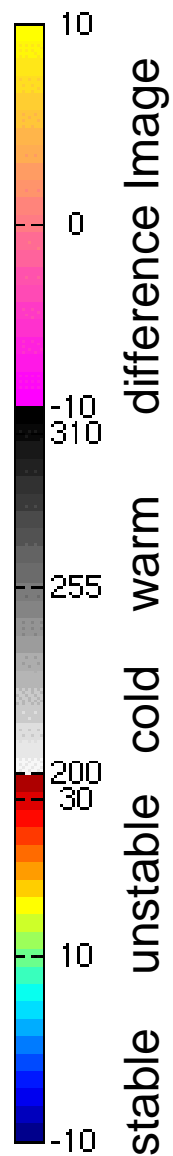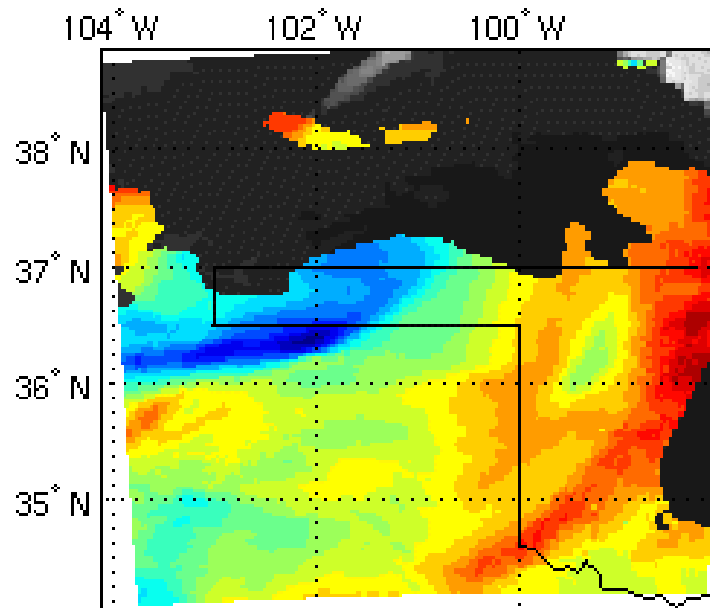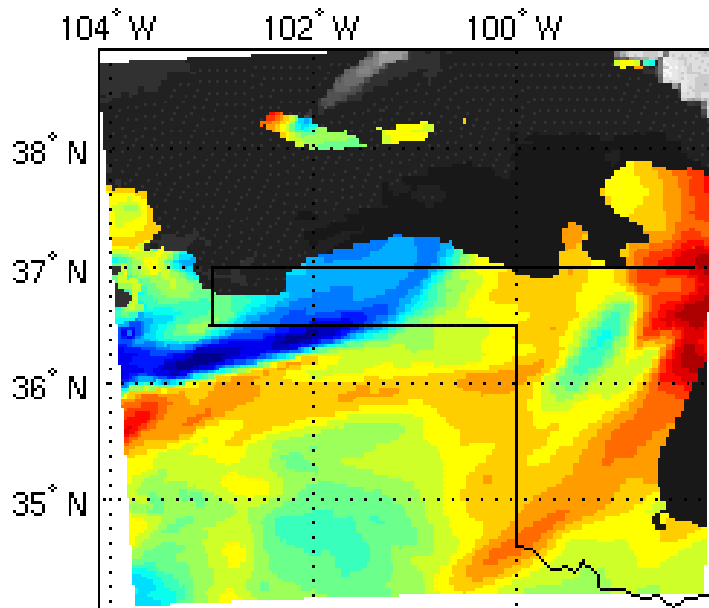

HES - ABI

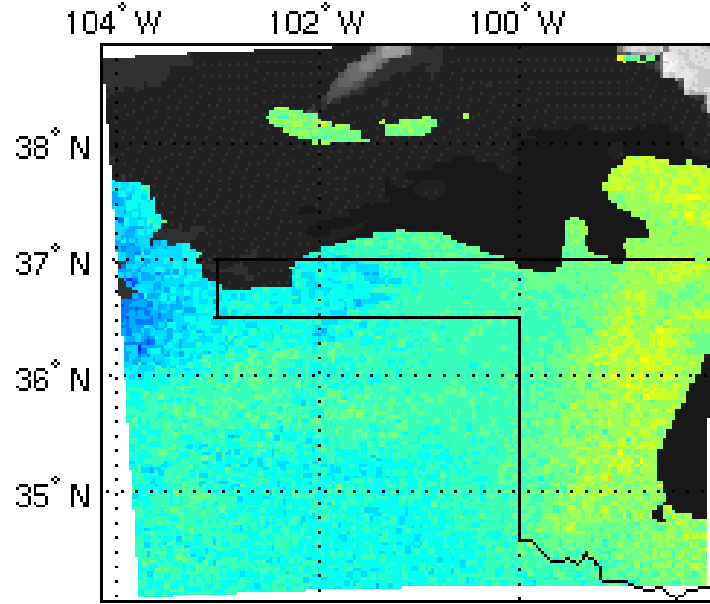


ABI RTVL

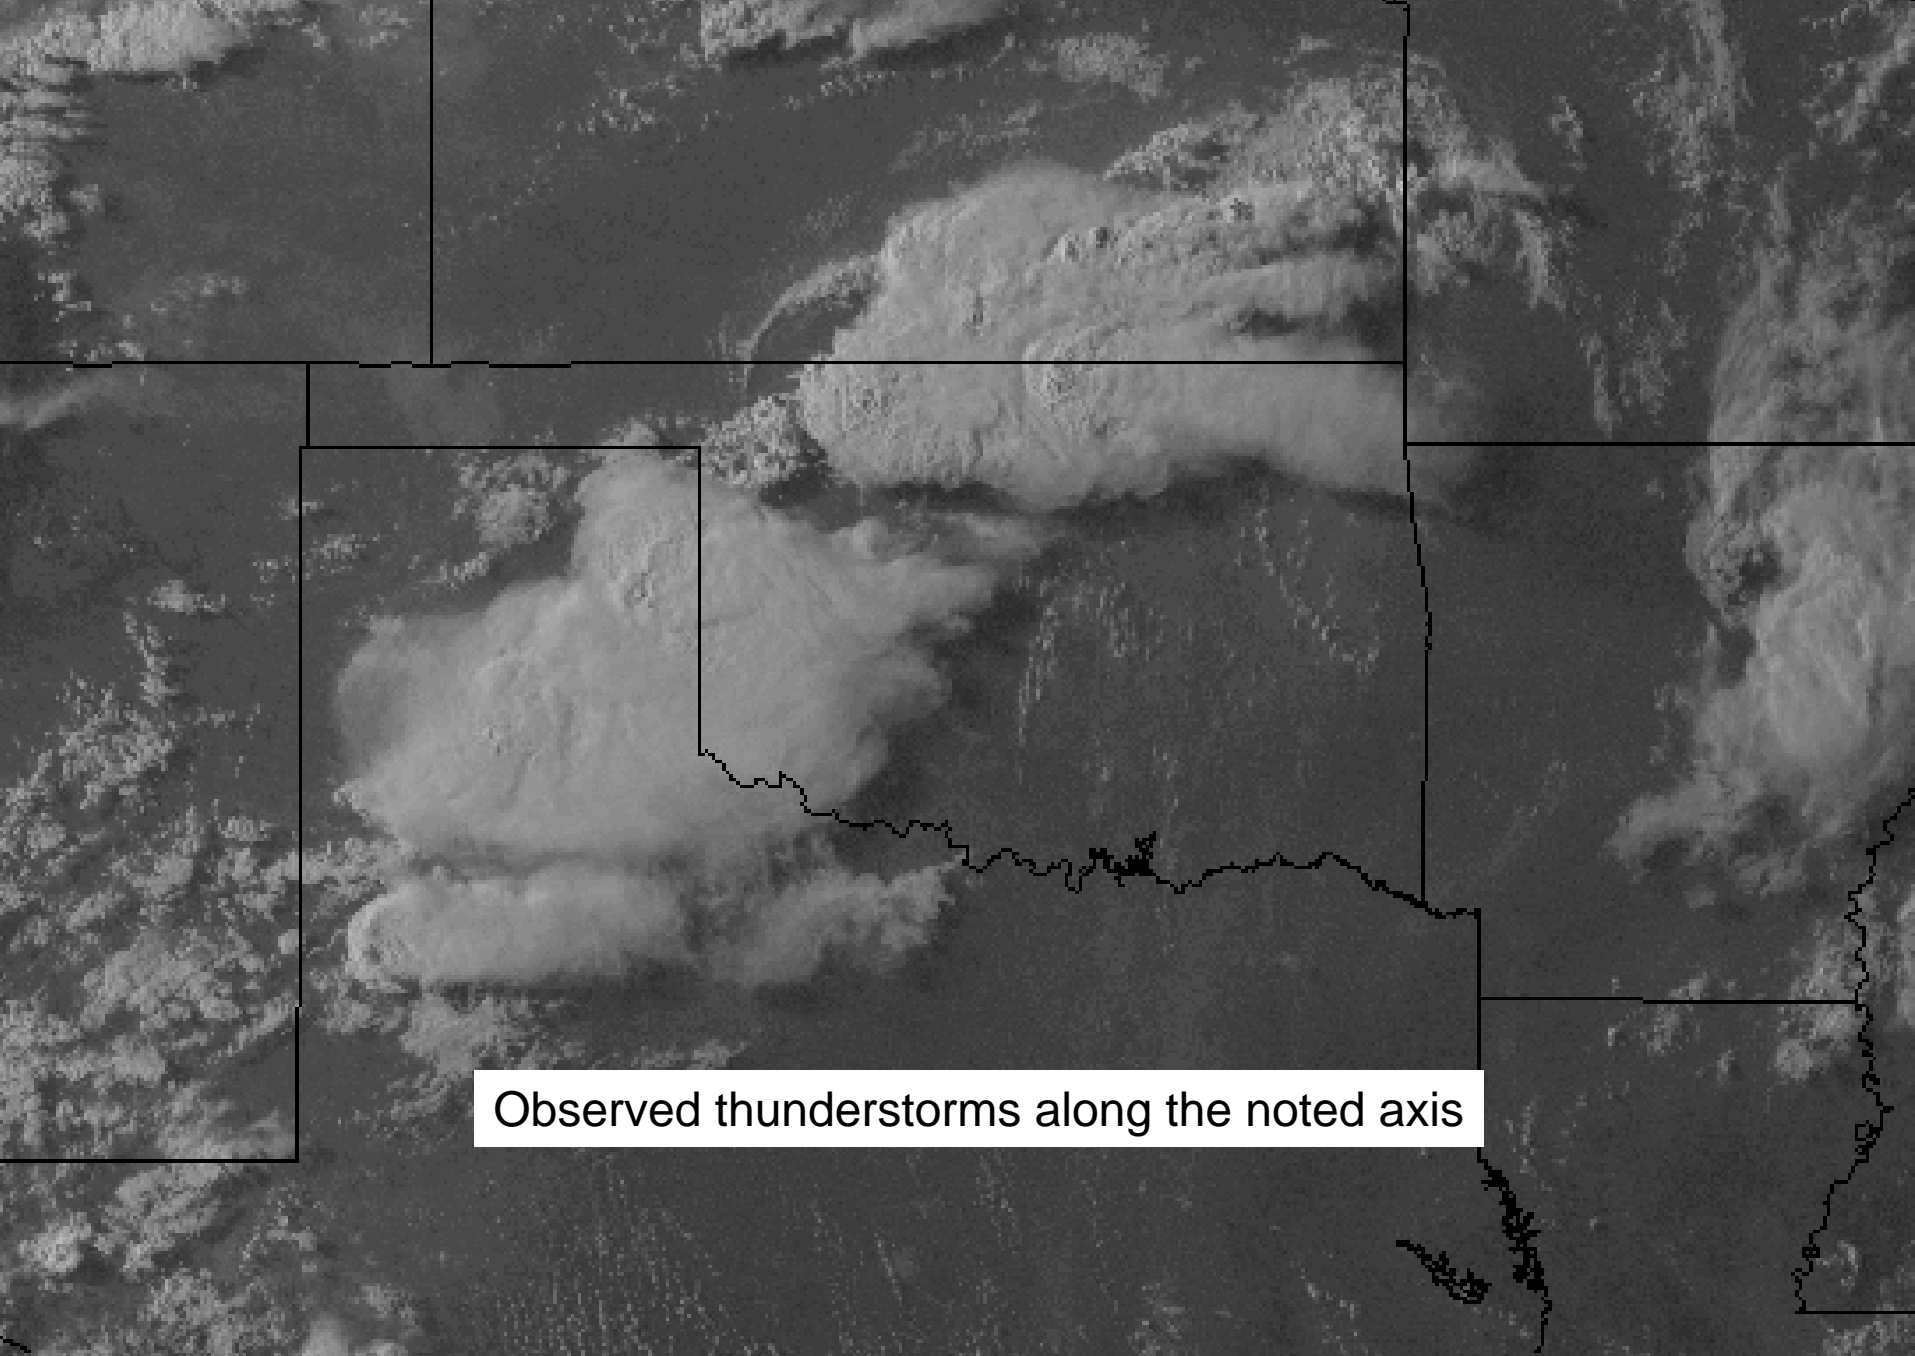


Observed thunderstorms along the noted axis

Time series of low-level vertical moisture structure during 9 hours prior to Oklahoma/Kansas tornadoes on 3 May 1999

Truth>

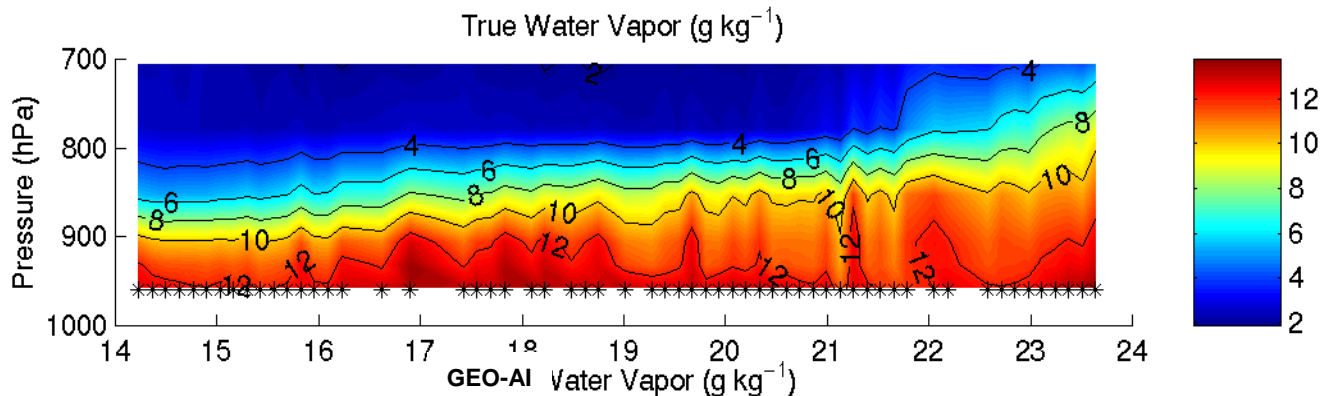


Geo-Adv. IR>

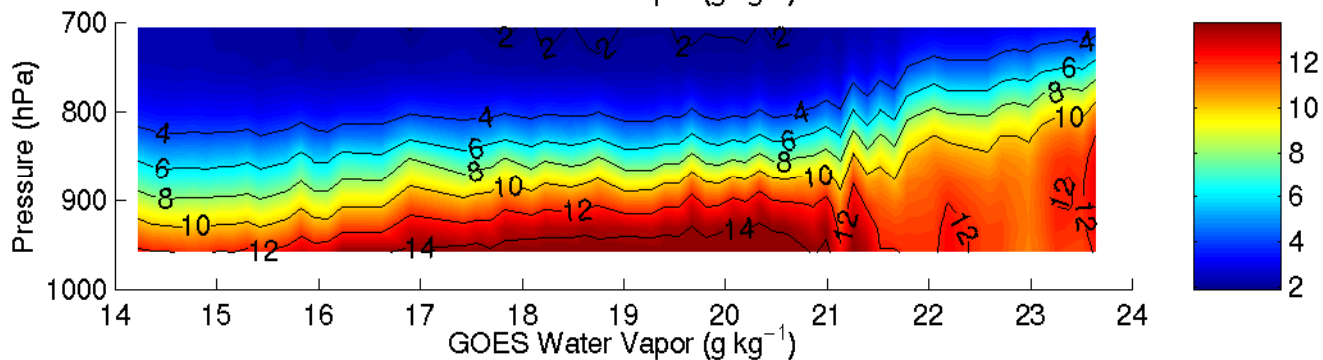

Note Geo-AI retains strong vertical gradients for monitoring convective instability



Current GOES>

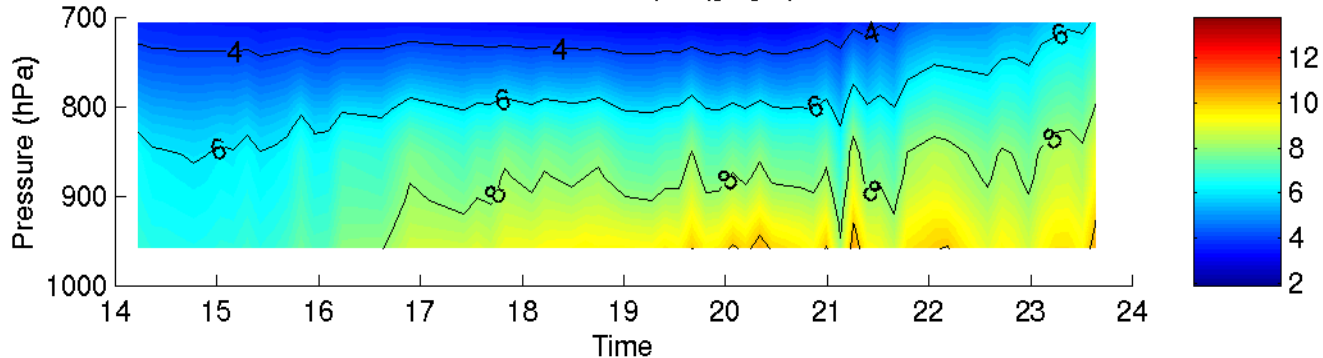

Geo-AI traces moisture peaks and gradients with greatly reduced errors

Geo Hyperspectral IR sees Boundary Layer Moisture


Geo-Increased Spectral Resolution Sounder (Geo-I) sees into Boundary Layer (BL) providing low level (850 RH) moisture information; Geo-Broadband Radiometer (Geo-R) only offers information above BL (700 RH)

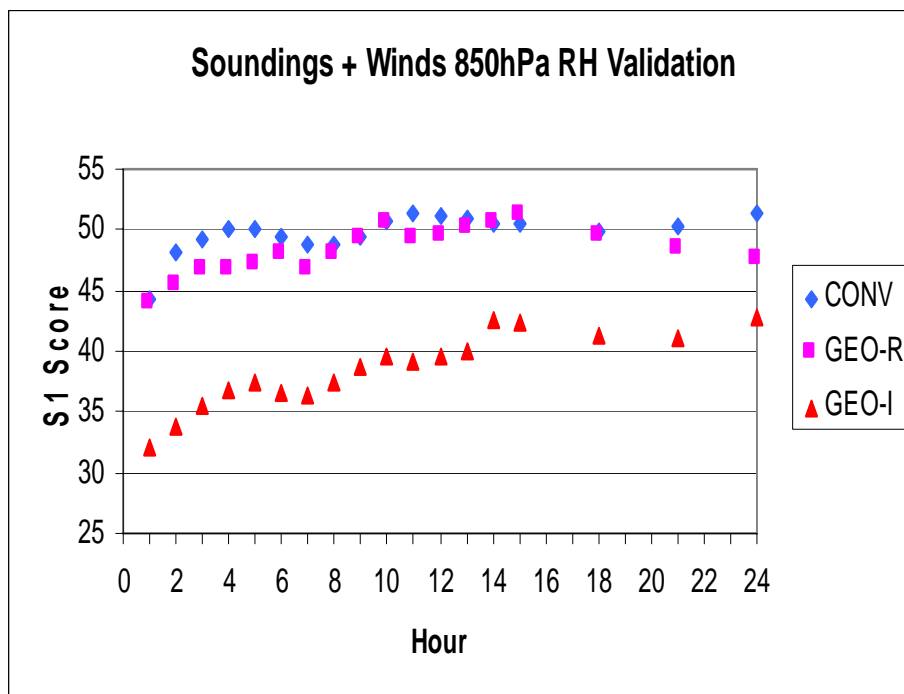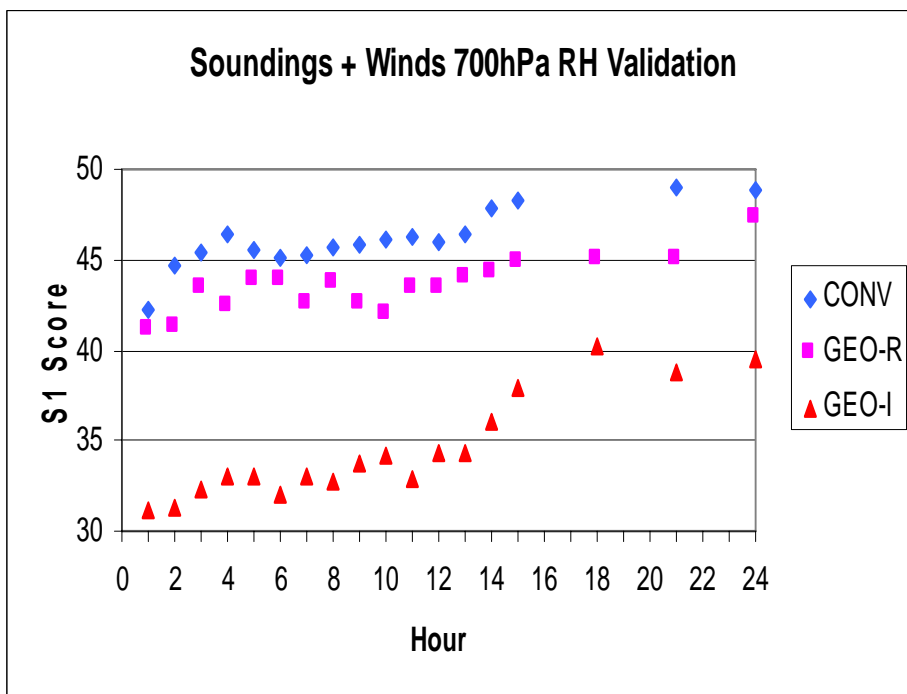

OSSE 12 hr assimilation followed by 12 hr forecast


Time frequency of Leo Hyperspectral IR insufficient to track changes in BL moisture

Two polar orbiting interferometers (Leo) do not provide temporal coverage to sustain forecast improvement out to 12 hours. Only hourly Geo-Increased Spectral Resolution Sounder (Geo-I) observations depict moisture changes well enough for forecast benefit.

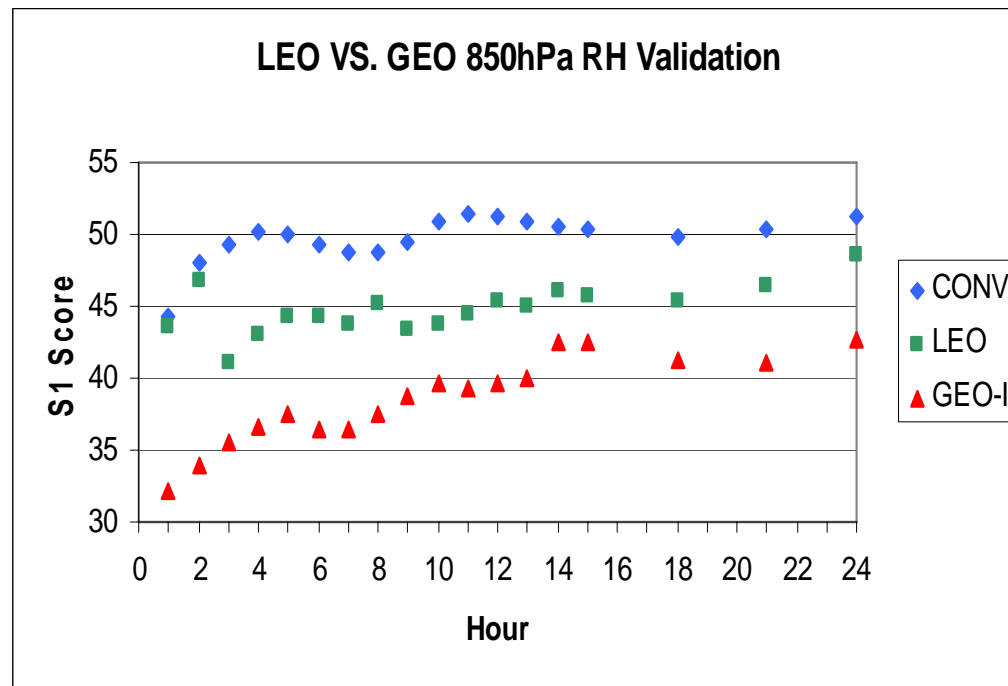


*Aune et al,
2000*

OSSE 12 hr assimilation followed by 12 hr forecast

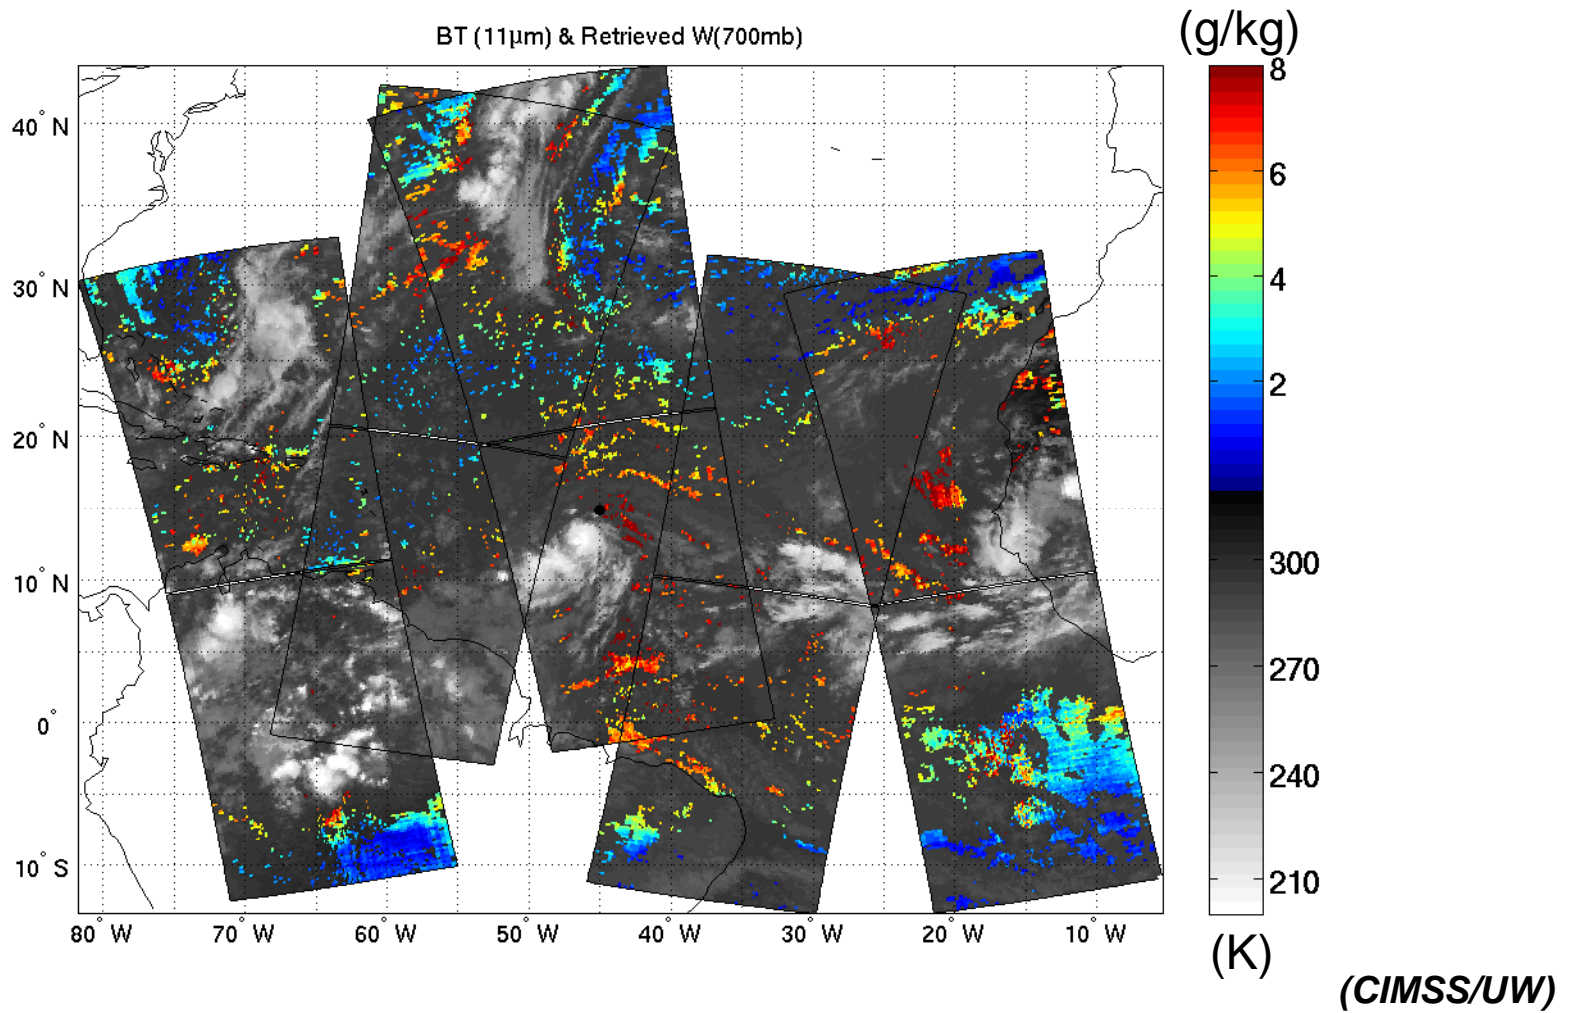

Clear sky AIRS SFOV water vapor retrievals at 700 hPa on 15 August 2007, each pixel provides vertical temperature and moisture soundings.

Tracks of 72h forecasts on Hurricane Dean

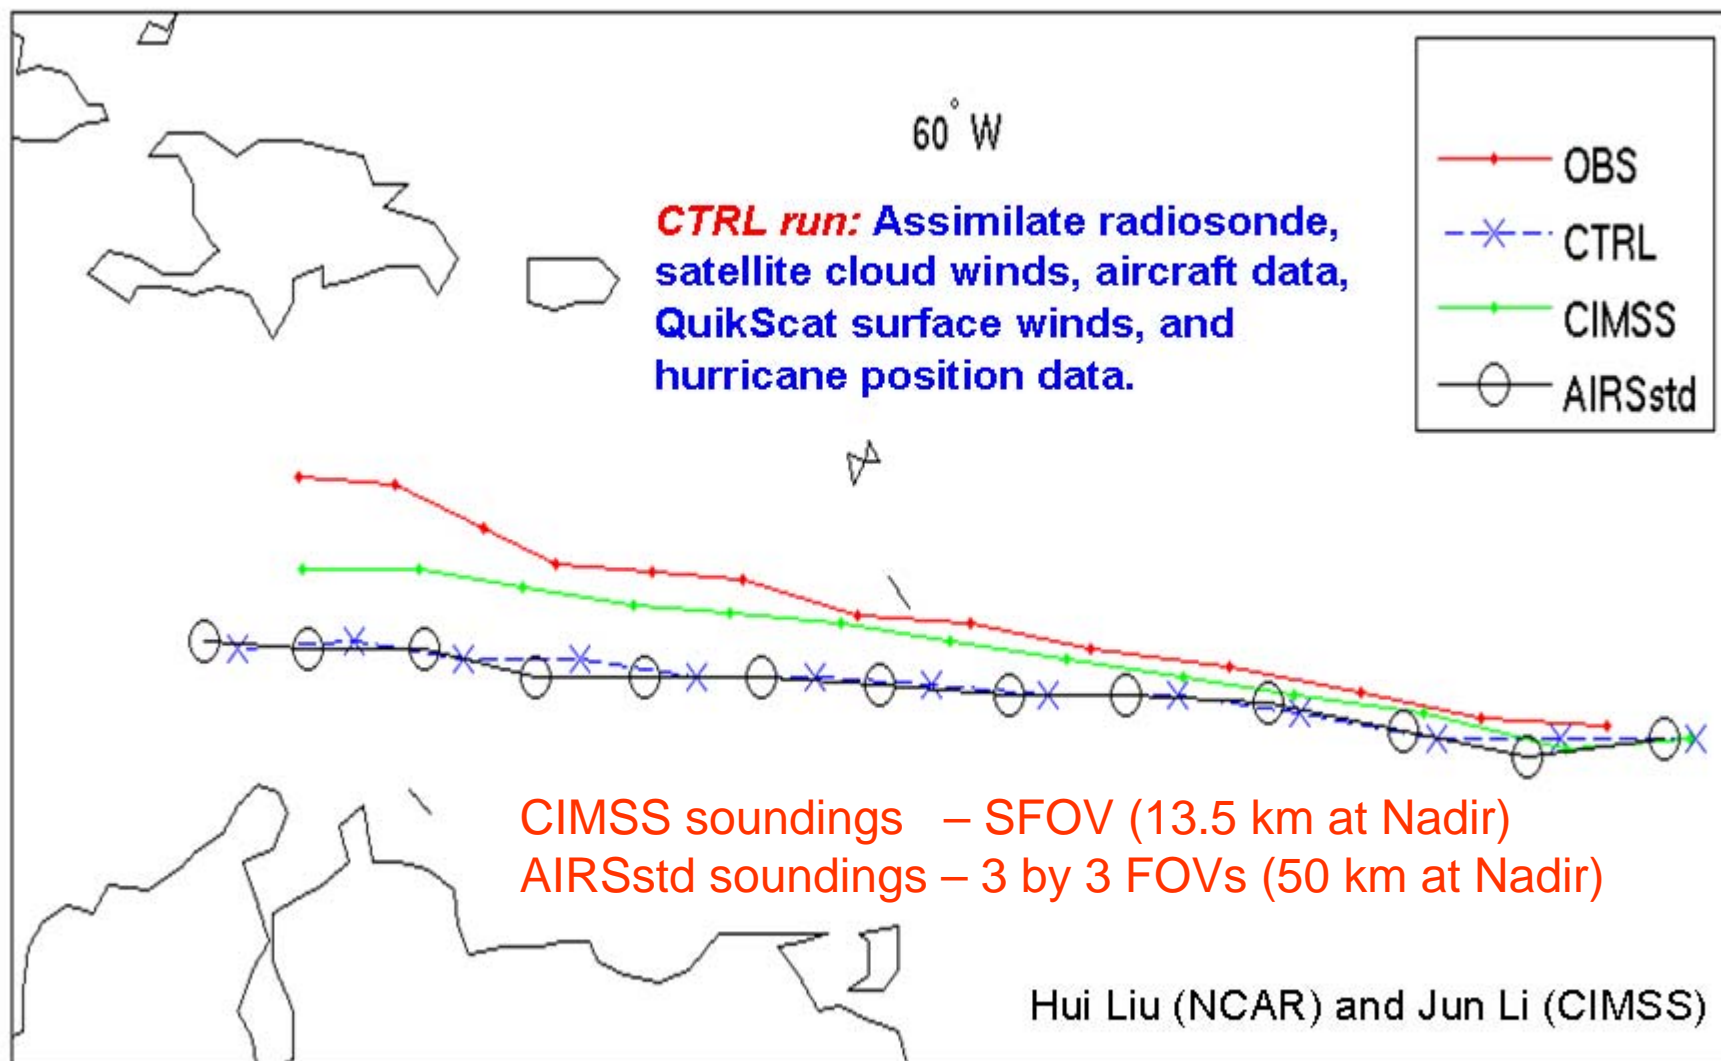

Forecast starts at 00 UTC, 16 August 2007
NCAR WRF/DART ensemble assimilation system at 36 km

Economic Benefits

- Previous cost-benefit analysis studies on the positive economic impact of GOES- were conducted by MITRE Corporation. The studies explored the potential for economic benefit from aviation, energy – both electricity and natural gas, irrigated agriculture, and recreational boating. These studies have concluded that **the benefits of high-temporal/spectral data are expected to be several billions of dollars.**
- The Centrec Consulting Group LLC recently prepared a report on the benefits of GOES. This effort was an extension of the previous cost-benefit analysis studies. At a 7% discount rate, the estimated present value amounts to more than \$4.5 billion.
- Based on expert judgment provided by scientists consulted during the project, **the HES benefits are estimated to be about half of the \$4.5 billion.** This is above the benefit of just continuing the current sensors.
- **An operational HES-type instrument will allow societal benefits by leveraging past expenditures on GIFTS and HES.**

Summary

- High vertical resolution profiles of temperature and water vapor are fundamental for improved weather forecasting and climate monitoring
- High spectral resolution measurements can meet requirements of
 - 1 degree Celsius for temperature and
 - 15% for water vapor mixing ratio
- Capabilities demonstrated by advanced infrared sounders in Low Earth Orbit (LEO)
 - Atmospheric InfraRed Sounders (AIRS) 2002 –
 - Infrared Atmospheric Sounding Interferometer (IASI) 2006 -2022
 - Cross-track InfraRed Sounder (CrIS) 2010 – 2022
- These requirements are not being met in GEO orbit
 - Current GOES, GOES-R and –S (present – 2022)
 - Current instruments and data processing have succeeded in showing how to make a revolutionary advance with low technical risk

Summary (Continued)

- **Validated, user requirements** can only be met with a high-spectral sounder in geostationary orbit.
- Many groups (national and international) have agreed with the recommendation for a **fully capable advanced sounder**. Risk would be mitigated with an on-orbit demonstration.
- The uses of these data include not only **nowcasting and numerical weather prediction**, but a host of other applications (winds, air quality, Sea Surface Temperature, clouds, hazards, etc).
- **Societal benefits** of high spectral/temporal information outweigh the costs.

More Information

- GOES and NASA:
 - <http://goespoes.gsfc.nasa.gov/goes/index.html>
 - <http://goes.gsfc.nasa.gov/text/goes.databookn.html>
- GOES-R
 - <http://www.goes-r.gov>
- ABI Research Home page:
 - <http://cimss.ssec.wisc.edu/goes/abi/>
 - AMS BAMS Article on the ABI (Aug. 2005)

6th GOES Users' Conference

Bringing Environmental Benefits to a
Society of Users

November 3–5, 2009
Madison, WI

<http://www.goes-r.gov>

