

Wind Imaging Spectrometer and Humidity-sounder (WISH): a Practical and Effective NPOESS P3I Sensor

Jeffery J. Puschell
Raytheon Space and Airborne Systems

Hung-Lung Huang
University of Wisconsin, Madison

Hal J. Bloom
National Oceanic and Atmospheric Administration

2005 May 25

The 14th International TOVS Study Conference, 2005 May 25-31, Beijing, China



Overview

Raytheon




- **Tropospheric wind is a top priority NPOESS Pre-Planned Product Improvement (P3I) EDR candidate**
- **We propose to retrieve this EDR by tracking high spatial resolution altitude-resolved water vapor sounding features in imagery provided by a humidity-sounding imaging spectrometer**
- **Our Wind Imaging Spectrometer and Humidity-sounder (WISH) is suitable for flight on any of the NPOESS spacecraft and can be developed in time for NPOESS C2**
 - **Takes advantage of payload capacity available for P3I demonstrations in NPOESS**
 - **Serves as a risk reduction and technology demonstration for future NOAA environmental satellite missions**

WISH consists of two identical spectrometers that measure wind by observing Earth in the 6.7 micron H₂O band.

Measurement Concept:

- Measure wind by looking for movement of water vapor features between observations made with two identical spectrometers
 - First observation occurs with spectrometer that is pointed 50 deg ahead of nadir along track
 - Second spectrometer occurs with spectrometer that is pointed 50 deg behind nadir along track
- Approximate time between measurements is 5.3 min
 - Feature will appear to move ~10 pixels for 20 mph wind

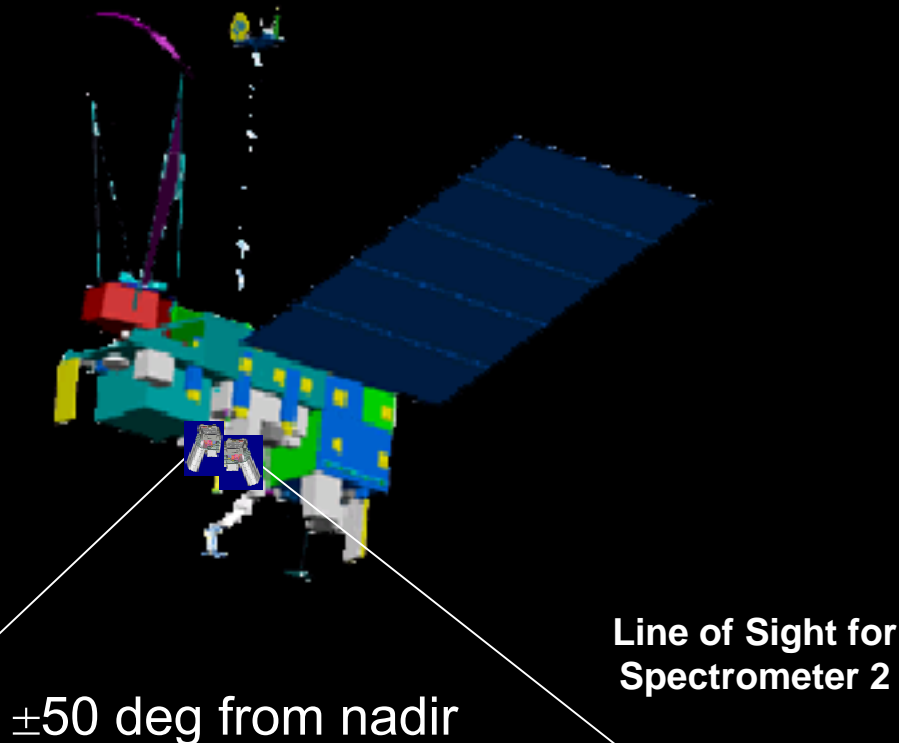

Line of Sight for Spectrometer 1


Line of Sight for Spectrometer 2

± 50 deg from nadir




WISH has a Simple Optical Layout


Raytheon

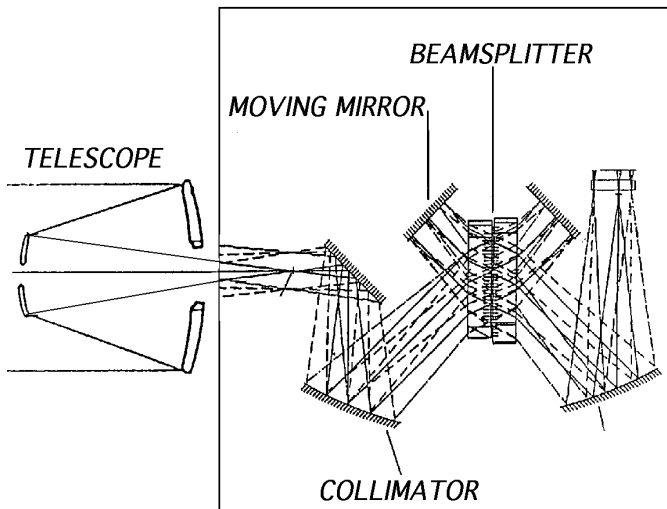

FOURIER TRANSFORM SPECTROMETER

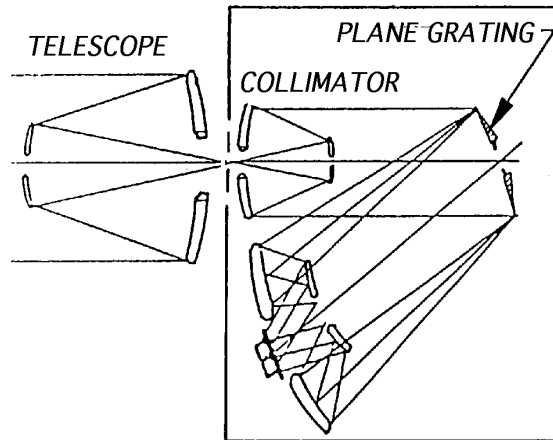

GRATING SPECTROMETER

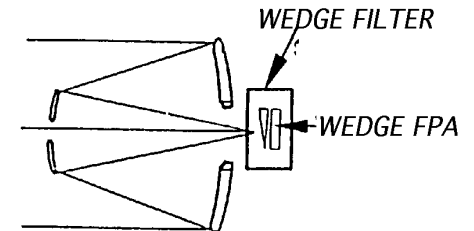

WEDGE SPECTROMETER



General Characteristics




- **Twin spectrometers fit within available NPOESS P3I footprints**
 - WISH can be accommodated in any NPOESS configuration
- **Difference in nadir angle is large enough to enable accurate wind measurements**
 - 50 deg nadir angle along track (fore and aft) of spectrometers leads to 5.3 min interval between measurements of same region
 - During this interval, a H₂O feature will appear to move ~10 pixels in a 20 mph wind
 - 1 m/s wind corresponds to movement of ~1 pixel in 5.3 min
- **Lightweight and low power**
- **Low cost**
 - Small, low risk instrument using existing technology
- **Low risk**
 - Requires no new technology
- **Good spatial resolution from NPOESS orbit**
 - 290 meter detector samples at 50 deg nadir angle
- **Excellent sensitivity**
 - Fast f/#, high IR transmittance, PV HgCdTe detectors, active cooling



NPOESS: 1330 CONFIGURATION

Planned for C2

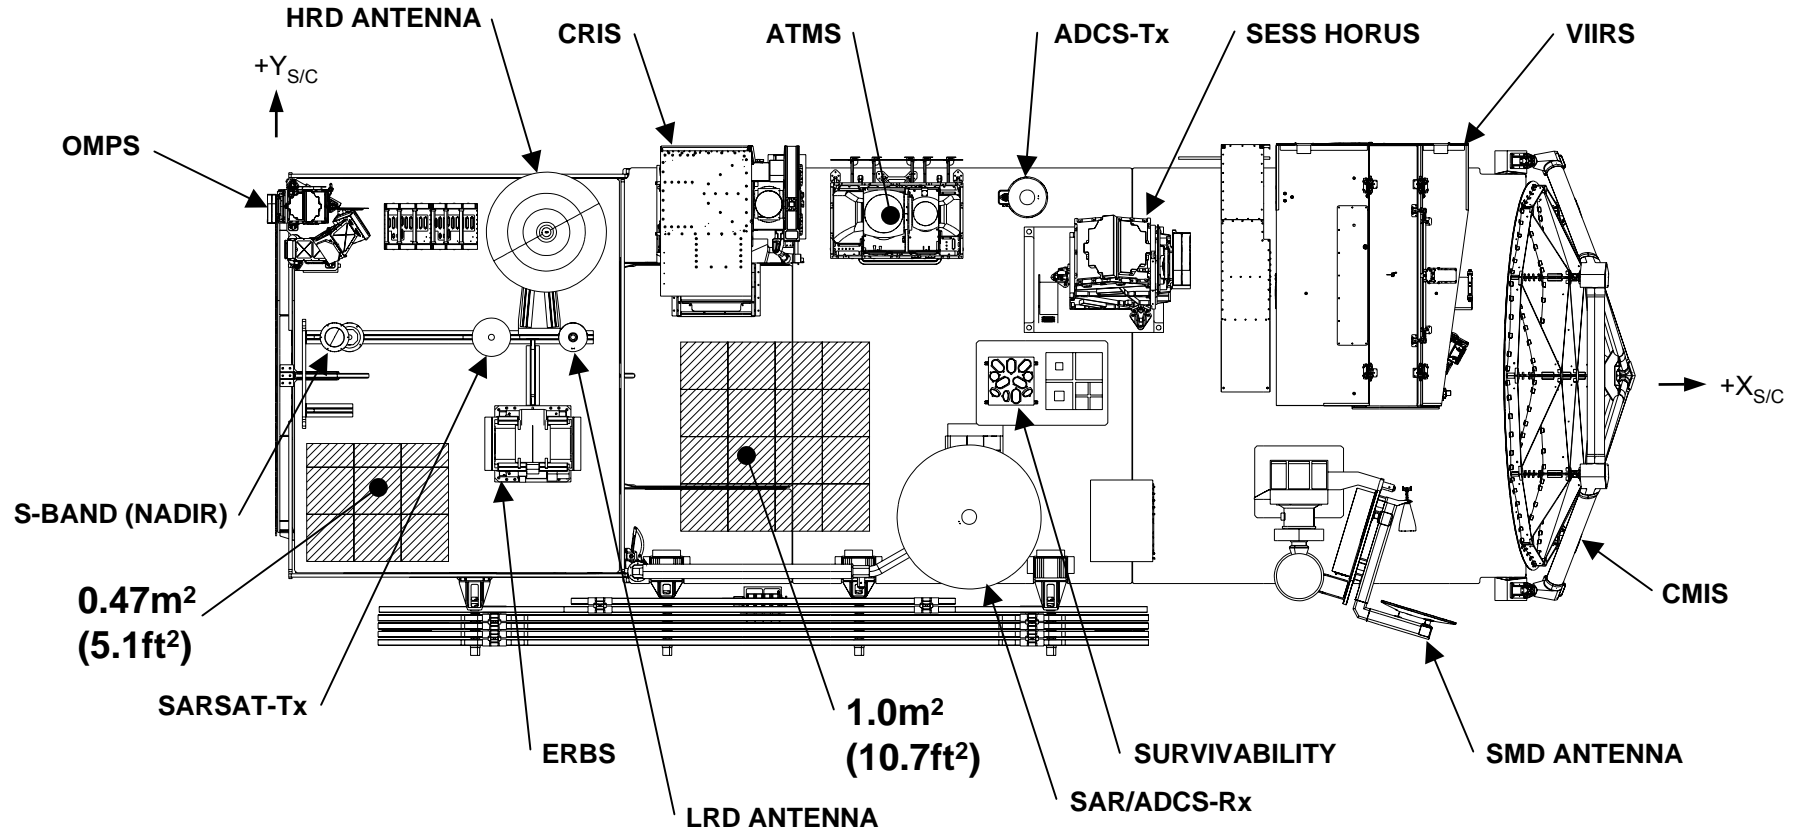

Unused Real Estate

 0.25m X 0.25m



WISH Footprint


STOWED CONFIGURATION



NPOESS: 1730 CONFIGURATION


Planned for C3

Raytheon

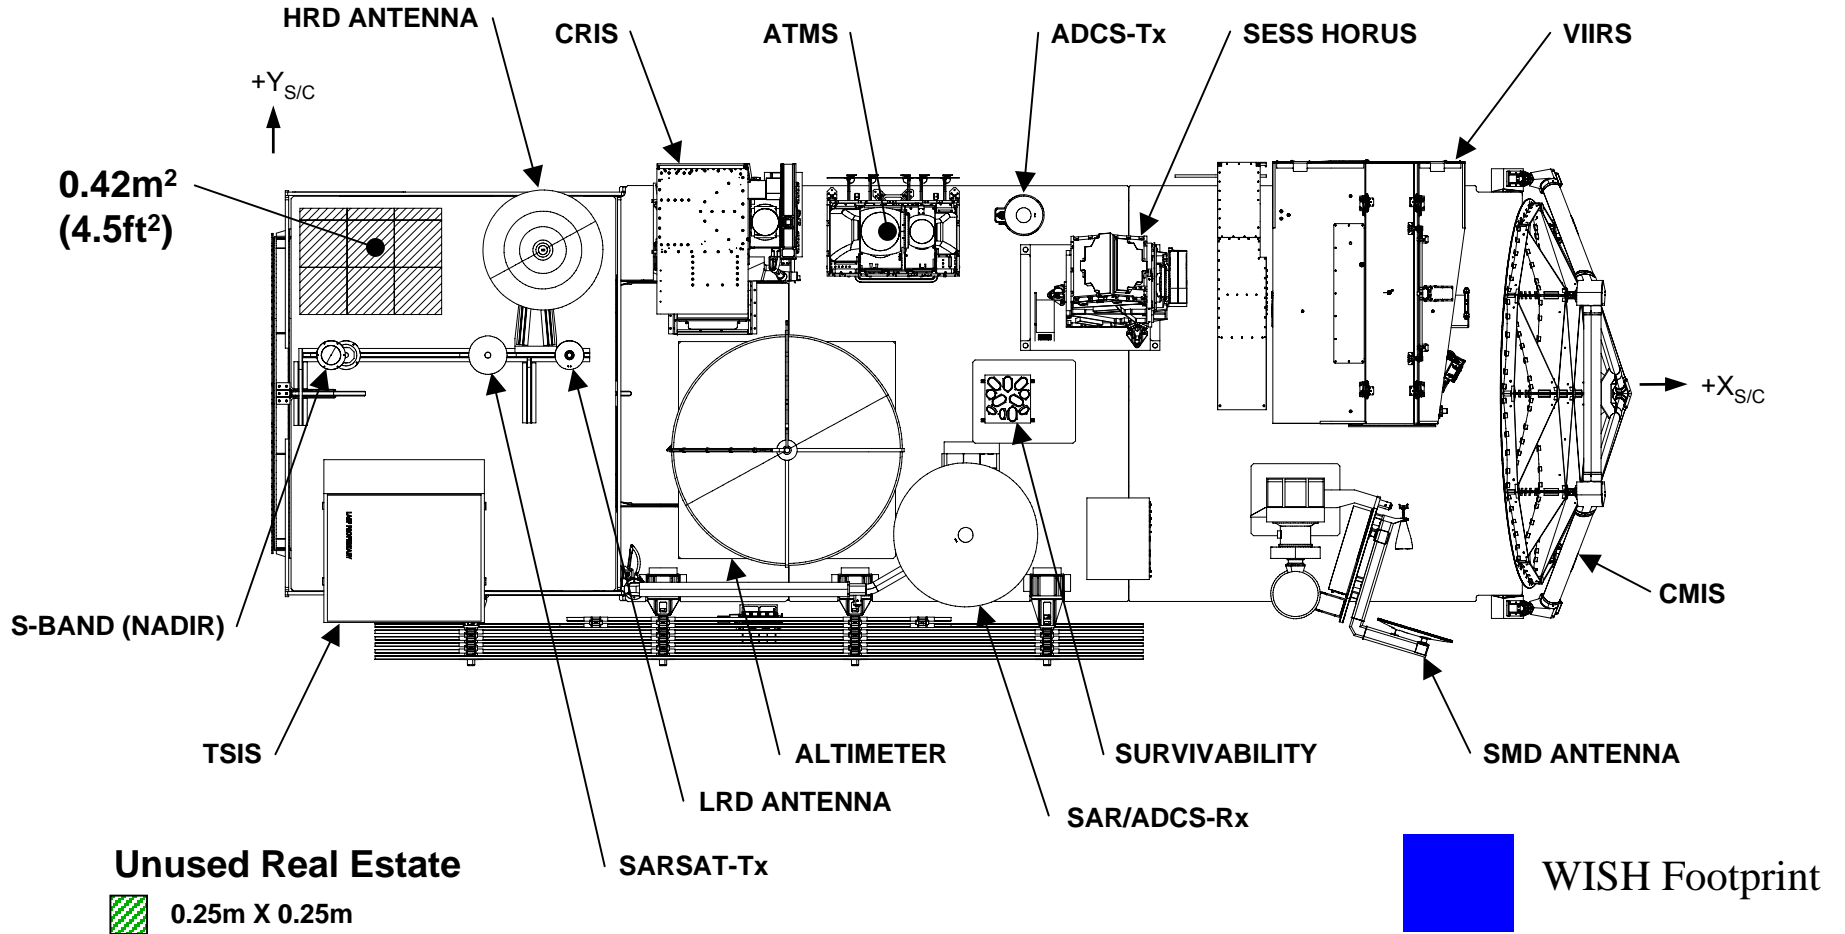


STOWED CONFIGURATION

Wedge Spectrometer Concept

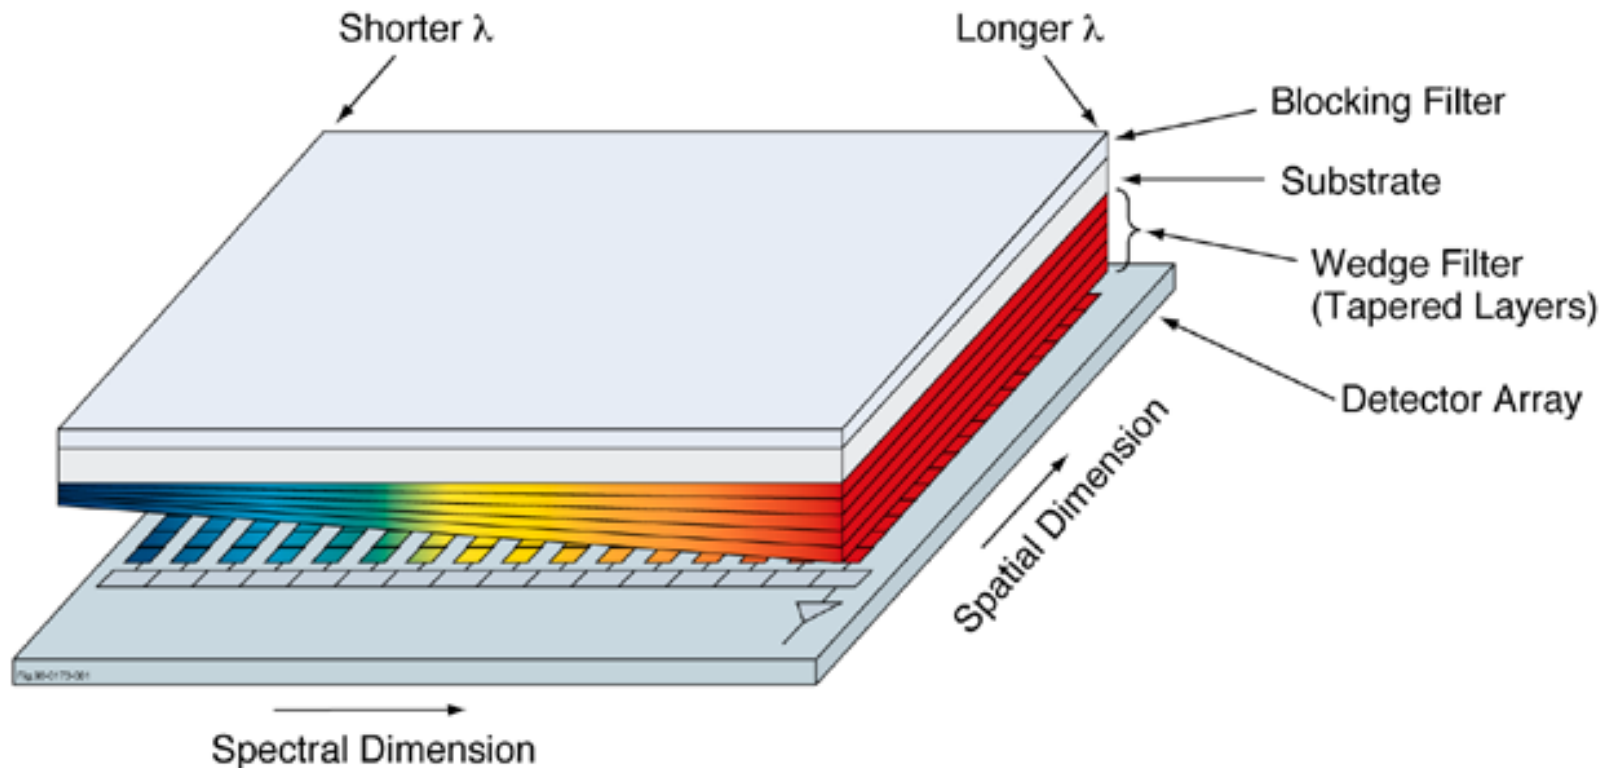




LWIR Hybridized Sensor Chip Assembly

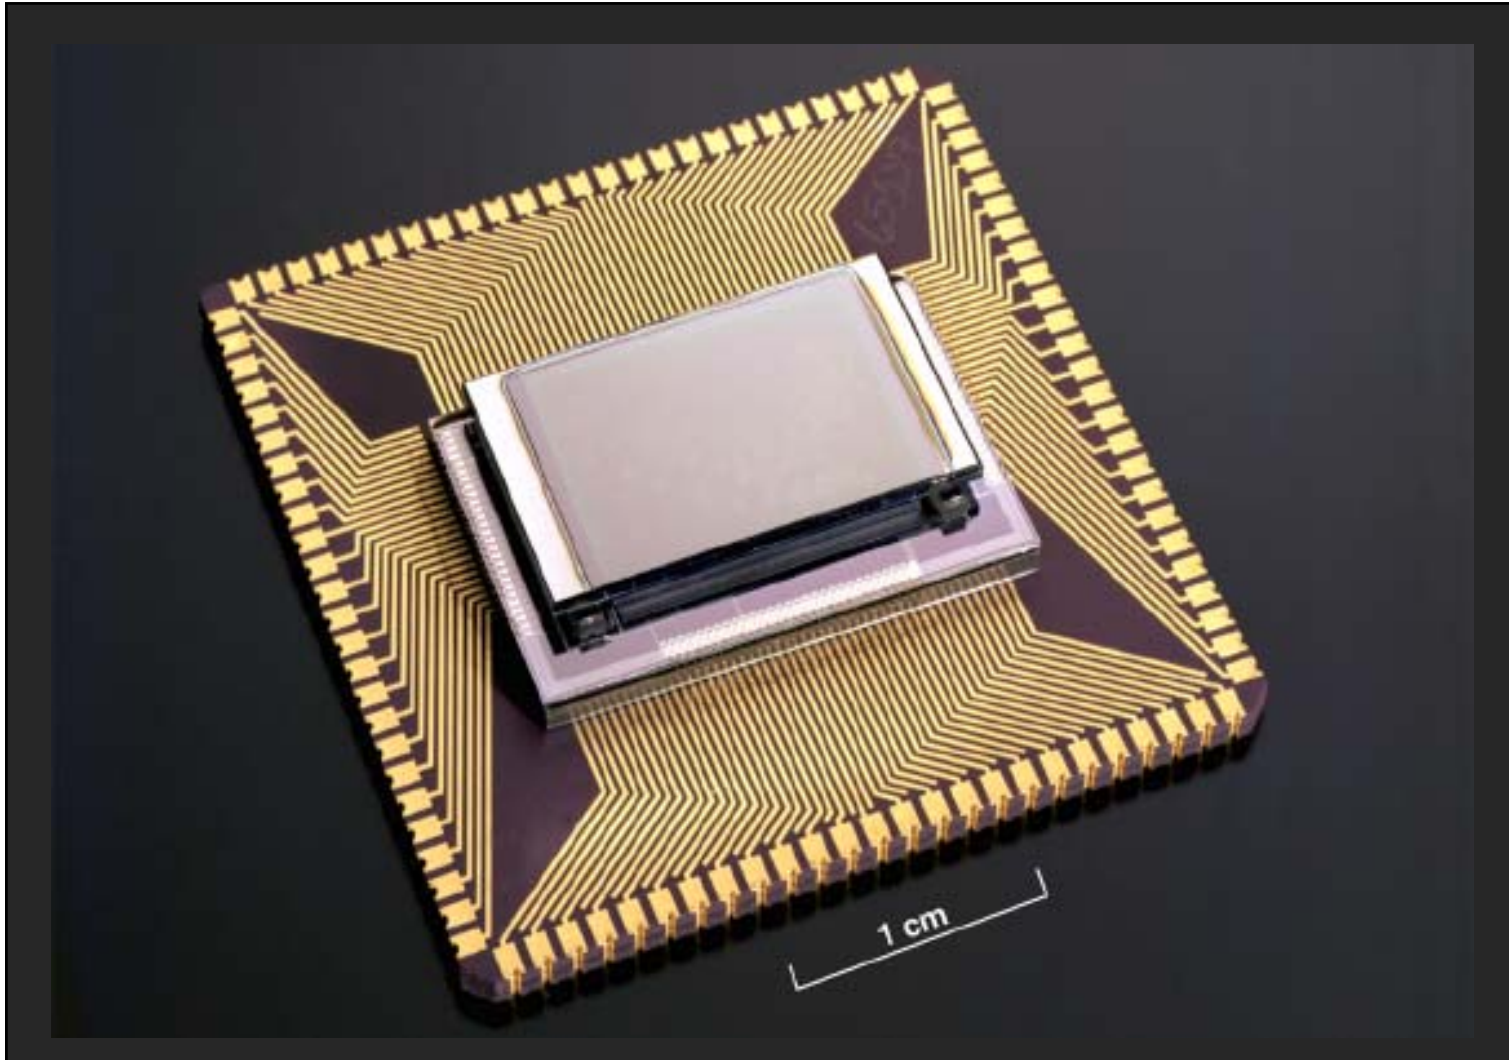



Characteristics of a Recent Raytheon LWIR Wedge Filter

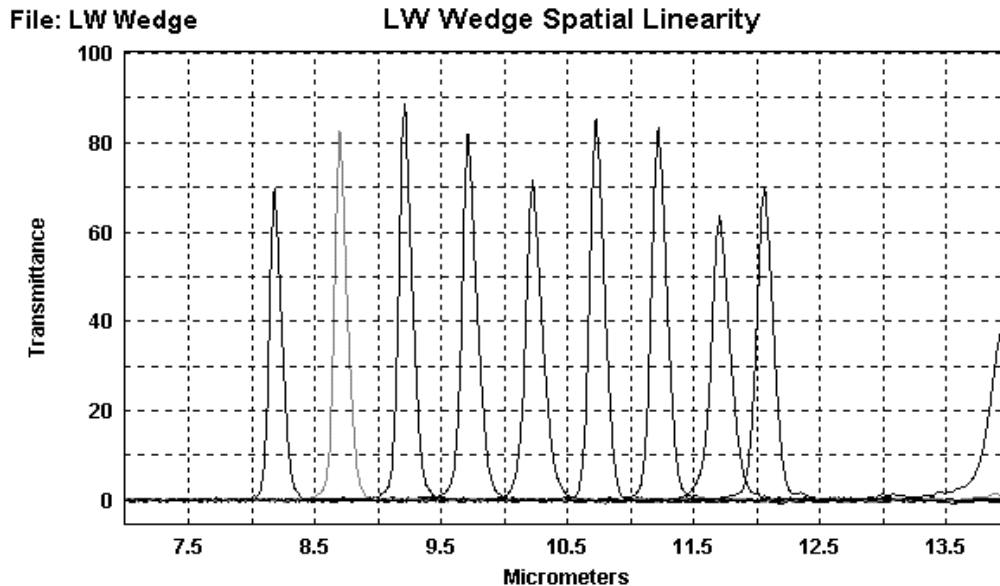

Spectral Range: 8-11.8 μm
Array Size
 Spatial: 320
 Spectral: 210
Detector Size: 40 μm
Orthogonal Channels: 27
Point Bandwidth: 1.5%
Transmission: ~80%

Wedge filter technology has been applied in the MWIR, too, and can be used out to 14 μm and beyond, making it a candidate technology for atmospheric sounders.



WISH Radiometric Sensitivity


Raytheon



Infrared Wedge Imaging Spectrometer

NEdT @ 300 K (60 K Detector)

1% spectral resolution (e.g. 15 cm^{-1} resolution at 1500 cm^{-1})

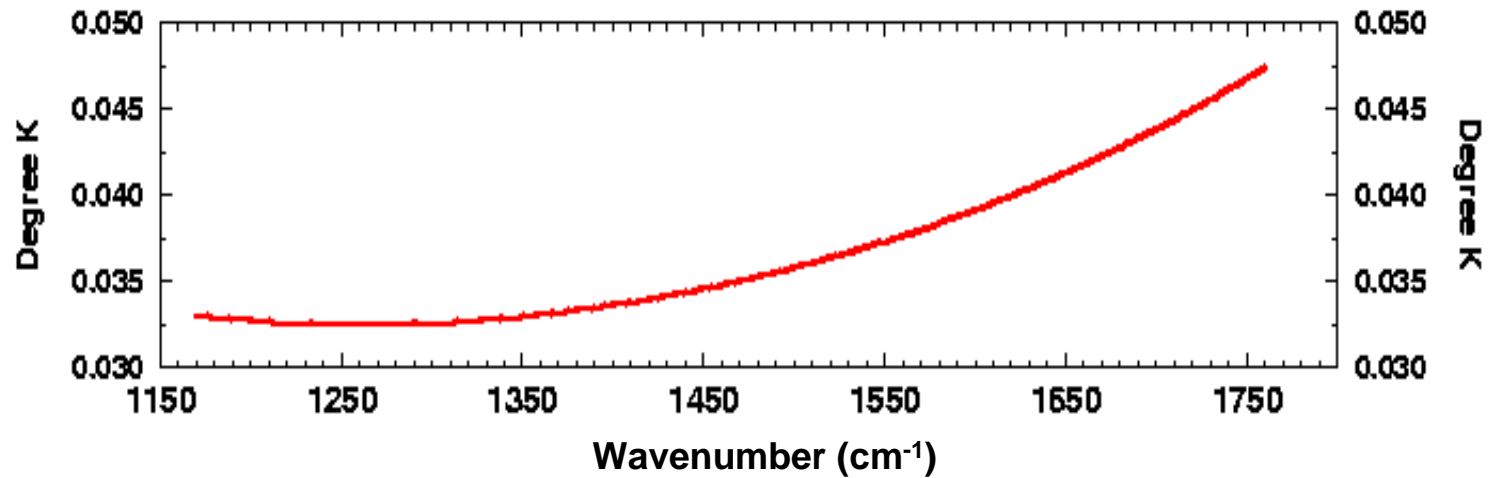



Technical Issues Requiring Further Study



- **Radiometric calibration accuracy performance of wedge spectrometer**
 - How does focal plane spectral/spatial sampling approach affect accuracy?
- **Spectral calibration**
 - Requires accurate mapping of wedge filter positions on detector arrays
 - Spectral calibration of data from specific earth grid points also depends on sensor pointing knowledge
- **Absolute line of sight accuracy for each pixel aboard NPOESS spacecraft**
- **Optimization of WISH design for more complete set of sensor requirements is needed to define sensor better**
 - Do we need to point the spectrometers 50 deg off nadir or can we look closer to nadir and minimize parallax and possible optical depth issues?



Summary

Raytheon



- **A Wind Imaging Spectrometer and Humidity-sounder (WISH) that incorporates recent MWIR/LWIR Raytheon technology developments offers a practical approach for measuring water vapor winds using spacecraft capacity available in NPOESS**
- **Due to its excellent (290 m) spatial resolution WISH can measure water vapor winds accurately with only a ~5 min measurement separation**
- **WISH offers an unprecedented combination of spectral and spatial resolution and would represent the first true imaging sounder**
- **More work is needed to optimize WISH sensor design and assess its absolute radiometric and spectral calibration and line of sight accuracy performance**